

# ESDG Series

# ESD Anti-Static Bags Conductive Grid


## General specifications

Material	PP/PE coated w/ conductive material
Outer layer resistivity	$10^5$ to $10^6 \Omega$
Inner layer resistivity	$10^{10}$ to $10^{11} \Omega$
Static decay time	5 KV to 0 V < 1 sec
Density	0.92 g/ml
Tensile strength	270 to 330 kg/cm <sup>2</sup>
Elongation	500%
Thickness	0.1 mm
<b>Mating parts series</b>	



## Mechanical dimensions

Unit: mm

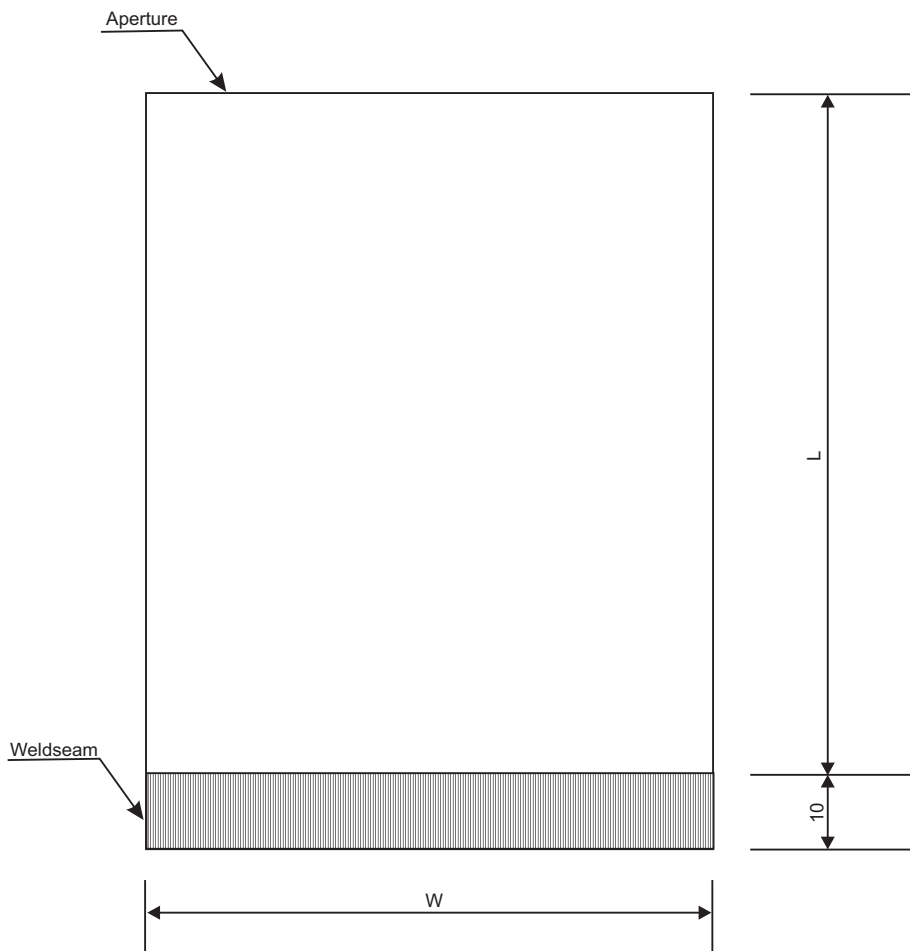

Tolerances	
Linear	± 5.00

Ordercode dimensions		
Ordercode	Width W	Length L
89000100R	100	150
89000200R	150	250
89000300R	200	250
89000400R	150	350
89000500R	150	400
89000800R	250	300
89000900R	300	300
89001000R	300	400
other dimensions on customer request		

## Part numbering guide

**ESDG**

Series  
For ordercode see table

\* standard

