


# 69A30 Series RJ45 w/ LED and USB Port

General specifications	
Insulator material	PBT w/ glass fiber, UL94V-0
Contact material	Phosphor bronze
Current rating USB / RJ45	1.5 A / 1.0 A
Voltage rating	125 VAC
Contact resistance USB / RJ45	40 mΩ / 50 mΩ max
Insulator resistance	200 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operation temperature	-40 °C to +85 °C
Durability USB / RJ45	1500 / 750 cycles
Soldering	Lead free wave soldering process
Mating parts series	



## Mechanical dimensions

Unit: mm

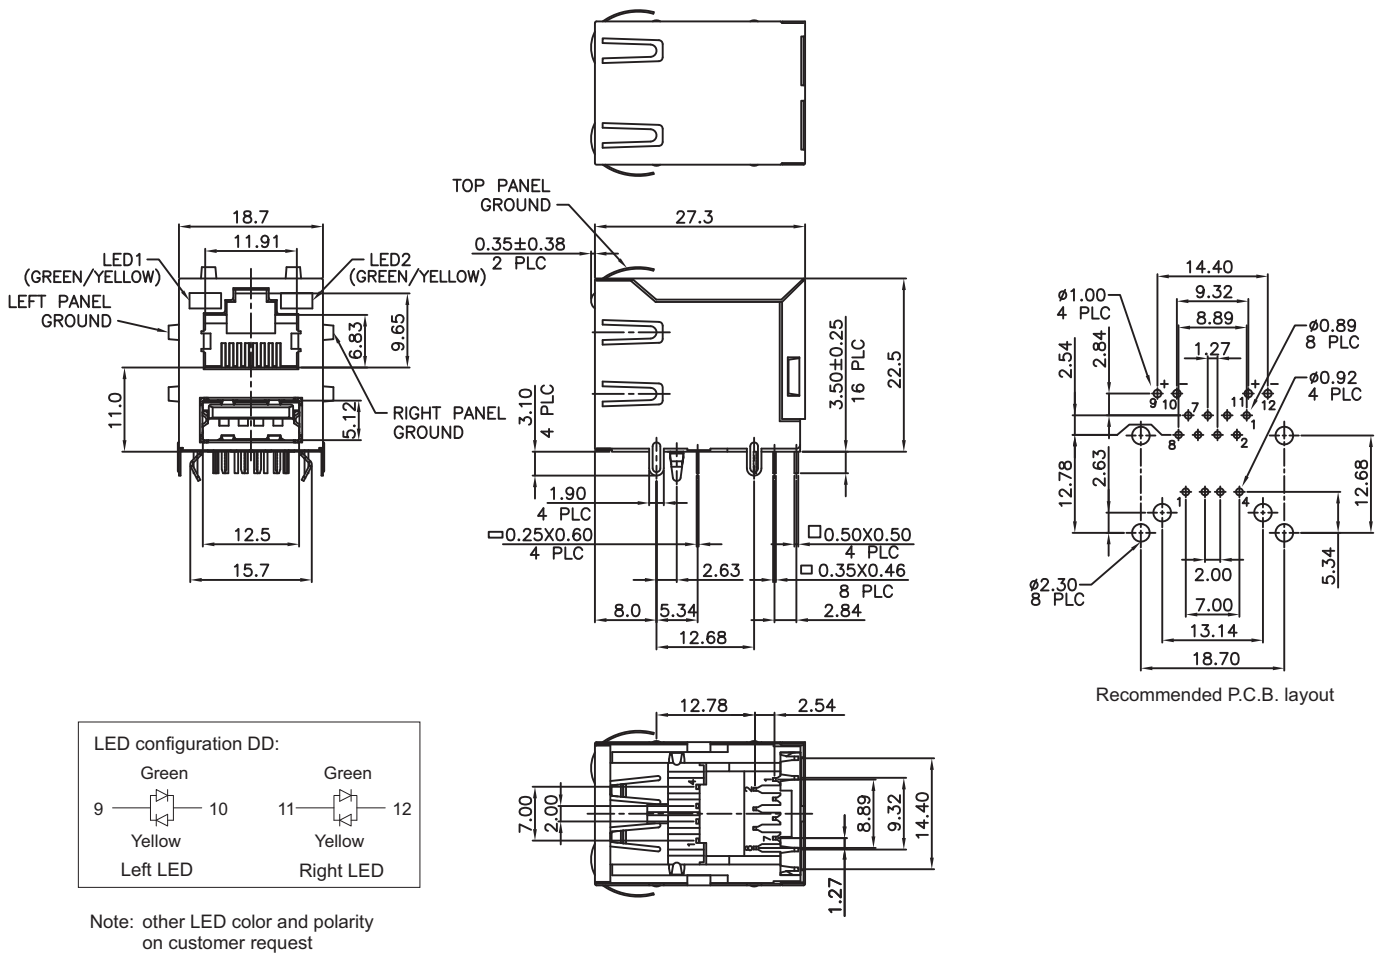

Tolerances	
Linear	± 0.25

## Part numbering guide

<b>69A30</b>	<b>J</b>	<b>D</b>	<b>D</b>	<b>0</b>
Series	Contact plating (RJ45/USB) D = 6 μ" / 30 μ" gold F = 15 μ" / 30 μ" gold J = 30 μ" / 30 μ" gold* K = 50 μ" / 50 μ" gold	Color LED1 N = w/o LED D = Green/yellow* G = Green Y = Yellow	Color LED2	Ground spring 0 = w/o spring 1 = Top spring 2 = Side spring 3 = Top and side spring

\* standard

