

3875 Series

USB Type A 4x Socket

General specifications

Insulator material	PBT w/ glass fiber, UL94V-0
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	250 VAC
Contact resistance	30 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-55 °C to +85 °C
Durability	1500 cycles
Soldering	Lead free wave soldering process


Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

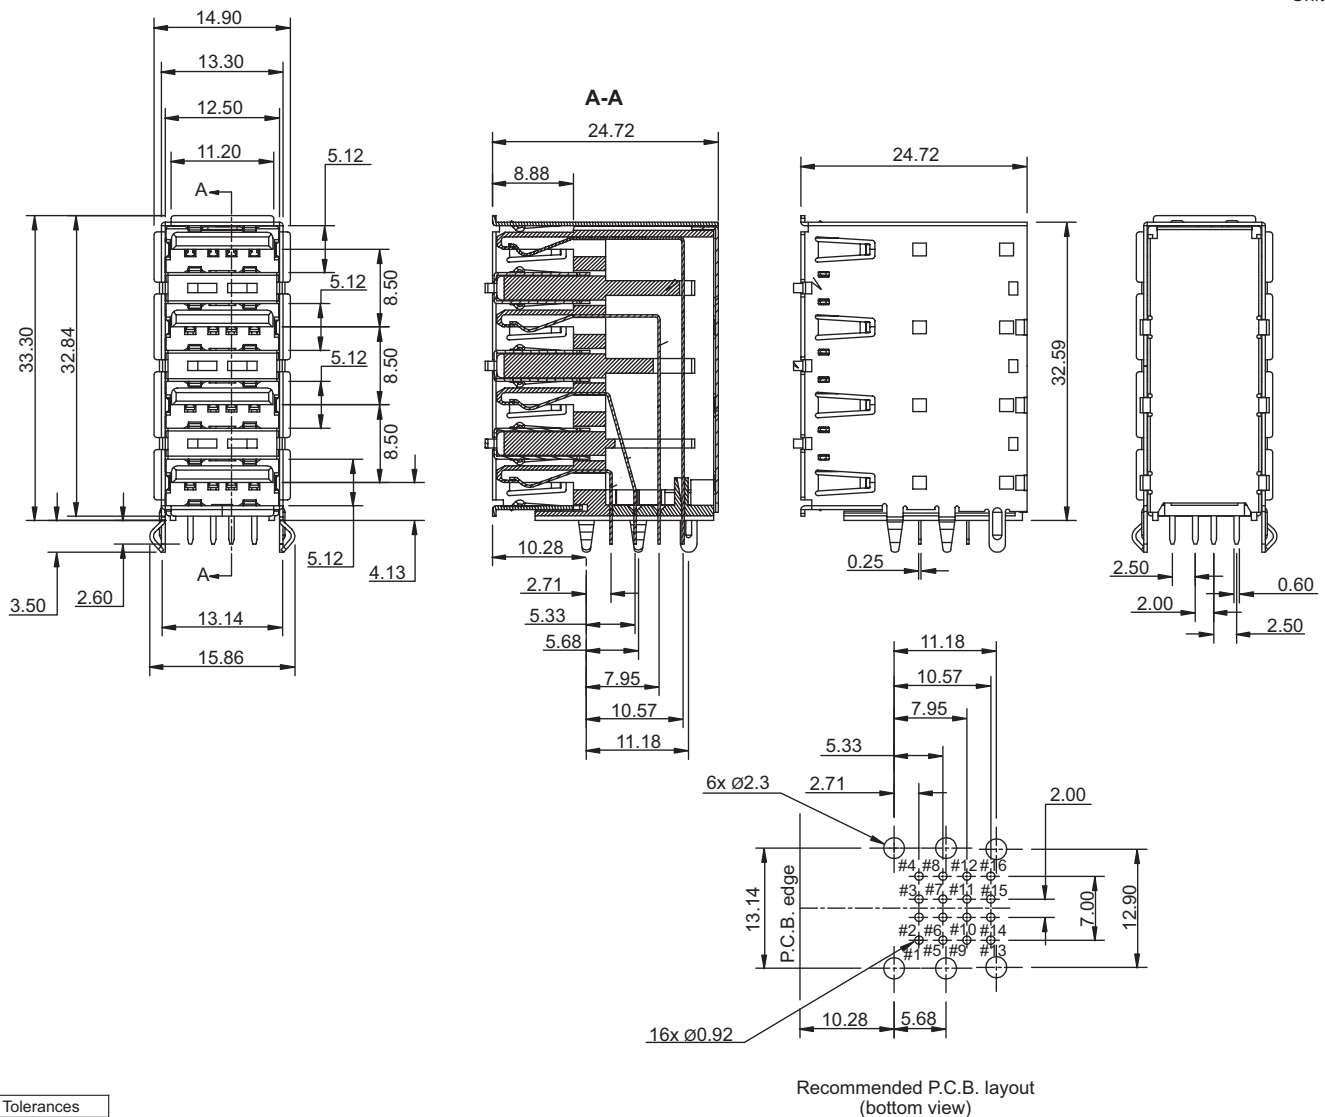

Tolerances	
Linear	± 0.20

Part numbering guide

3875 R	J	B	Y
Series R = THT right angle	Contact plating J = 30 μ" gold	Color B = Black W = White	Packing Y = Tray

* standard

