


4133 Series

2.5 mm Earphone Jack

General specifications

Insulator material	Nylon PA66, UL94V-0
Contact material	Phosphor bronze, plating: silver
Current rating	1 A
Contact resistance	50 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	2000 cycles





Mating parts series

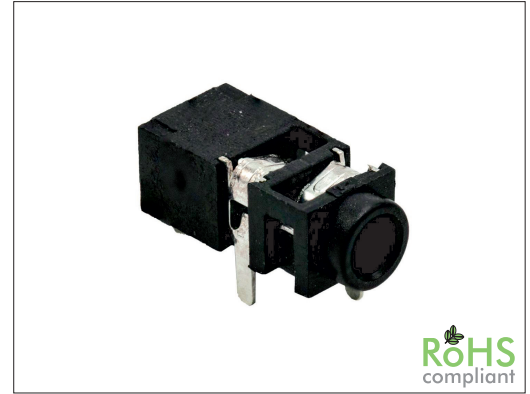

RoHS
compliant


Mechanical dimensions

Unit: mm

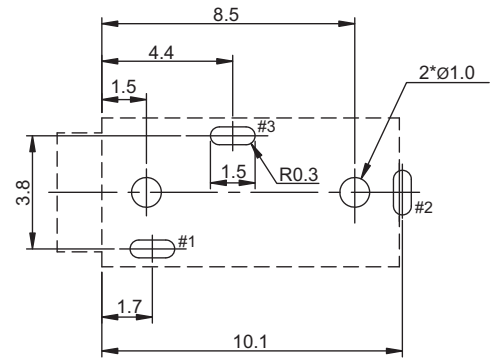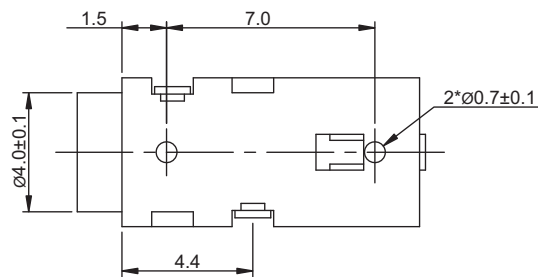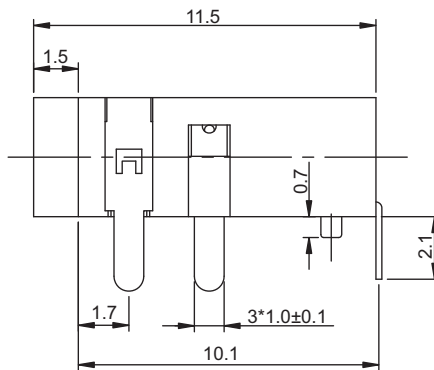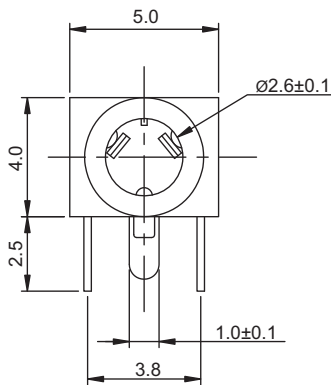


Recommended P.C.B. layout
(top view)
Tolerance: ±0.1

4133A03



Tolerances	
Linear	± 0.3

Part numbering guide



* standard

