

Series 5109



Battery Holder Vertical for CR2032

Material

Insulator: Nylon PA66 w/ glass fiber, UL94V-0
 Contact: Copper alloy
 Plating: Tin over nickel

Electrical

Rating: 3 V / 120 mA
 Contact resistance: 100 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectric withstanding: 500 VDC/minute
 Operating temperature: -55°C ~ +85°C
 Durability: 50 cycles

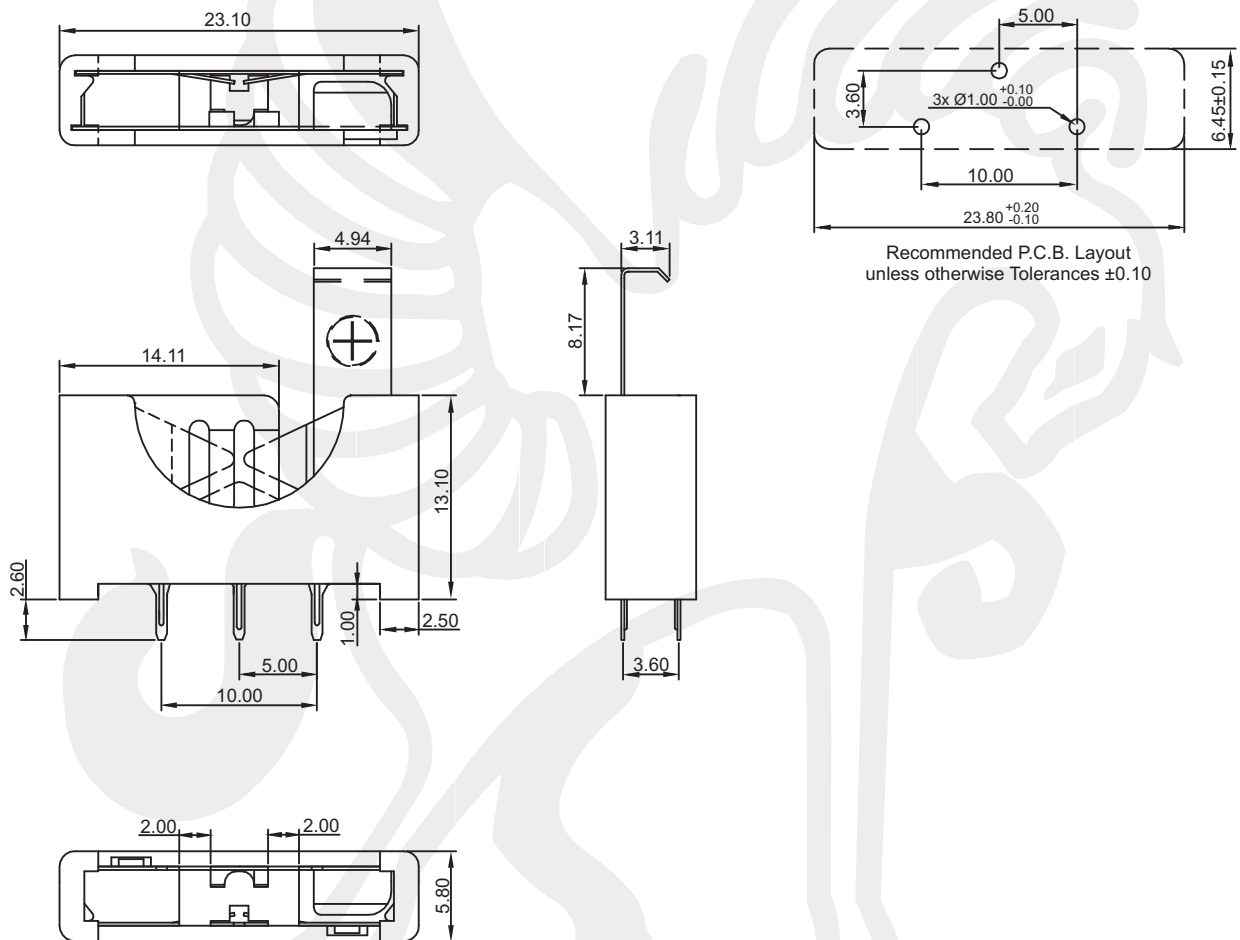

Recommended P.C.B. Layout
 unless otherwise Tolerances ±0.10

Tolerances	
Linear	.X ± 0.38
	.XX ± 0.25
	.XXX ± 0.20



All dim. in mm

5109

T

Plating
 T = tin