


64340 Series RJ45 8P Side Entry

General specifications

Insulator material	PBT w/ glass fiber , UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.0 A
Voltage rating	150 VAC
Contact resistance	50 mΩ max.
Insulator resistance	200 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles

Mating parts series

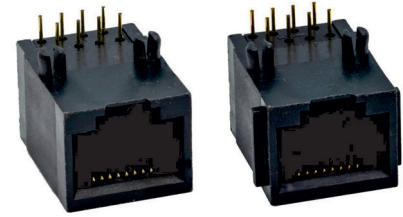


RoHS
compliant


Mechanical dimensions

Unit: mm



w/o panel stop and key

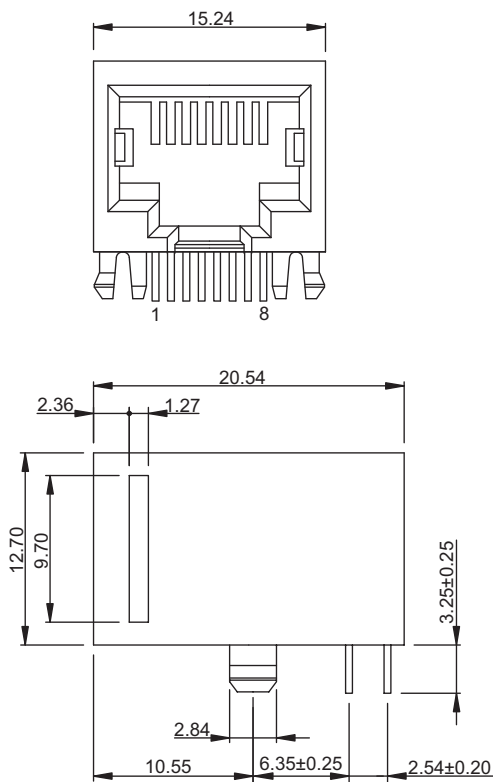

w/ key

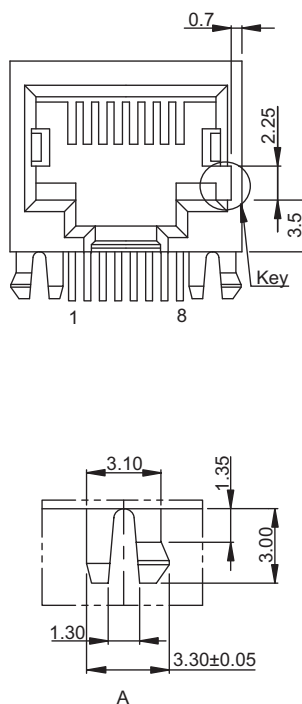

w/ panel stop

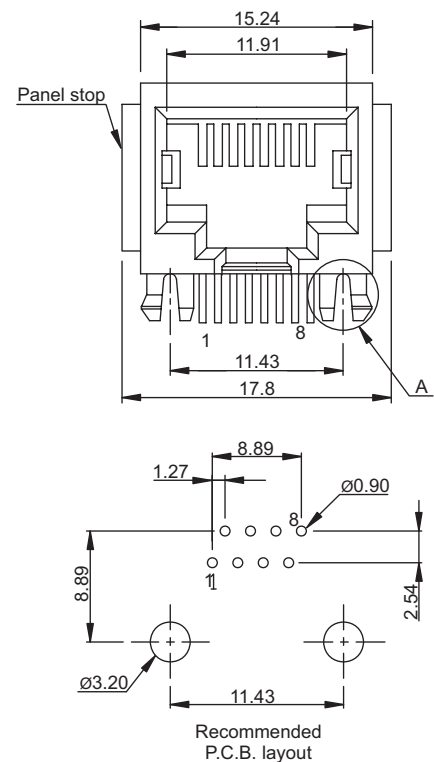

Tolerances		
Linear	X	± 0.25
	.XX	± 0.13
	.XXX	± 0.05

Part numbering guide

64340	C	0	0
Series	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold	K = 50 μ" gold Panel stop 0 = w/o panel stop 1 = w/ stop	Key 0 = w/o key 1 = w/ key

* standard

