

3210 Series

SCSI Ribbon Type Female Right Angle

General specifications

Insulator material	PBT, UL94V-0
Contact material	Phosphor bronze
Shell/ bracket	Steel, plating: nickel over copper
Current rating	1 A
Contact resistance	35 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-55 °C to +105 °C
Soldering	Lead free wave soldering process

Mating parts series


3218-K



RoHS compliant

Mechanical dimensions


Unit: mm

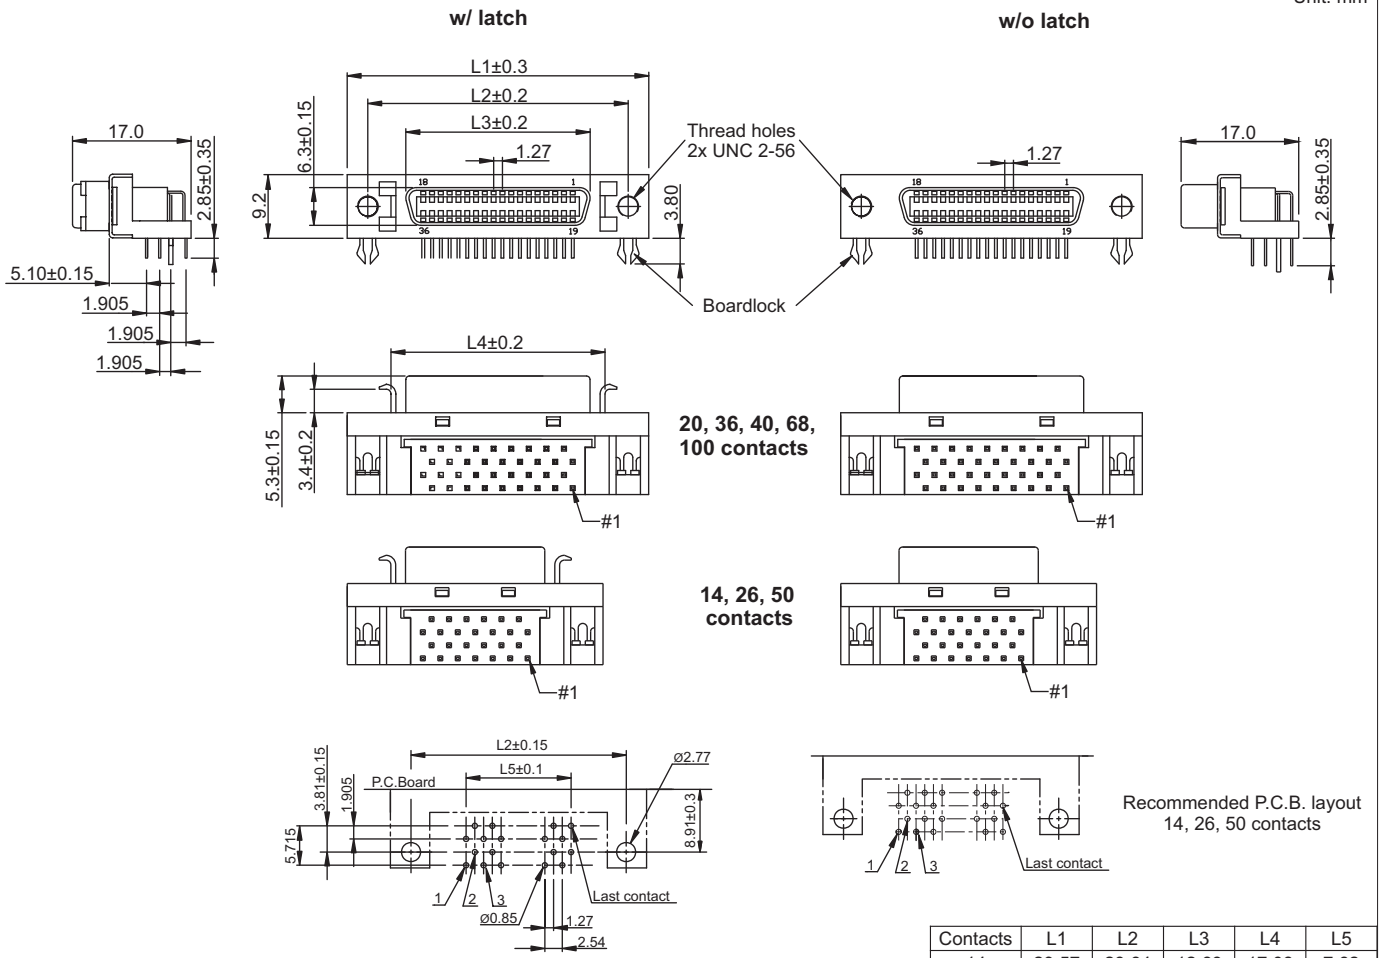

Contacts	L1	L2	L3	L4	L5
14	29.57	23.64	12.63	17.08	7.62
20	33.40	27.45	16.44	20.83	11.43
26	37.19	31.26	20.25	24.64	15.24
36	43.54	37.61	26.60	31.05	21.59
40	46.15	40.15	29.14	33.70	24.13
50	52.50	46.50	35.49	39.88	30.48
68	64.00	57.92	46.92	51.32	41.91
100	84.18	78.23	67.10	71.64	62.23

Tolerances		
Linear	X.	± 0.30
	X	± 0.25
	.XX	± 0.15

Part numbering guide

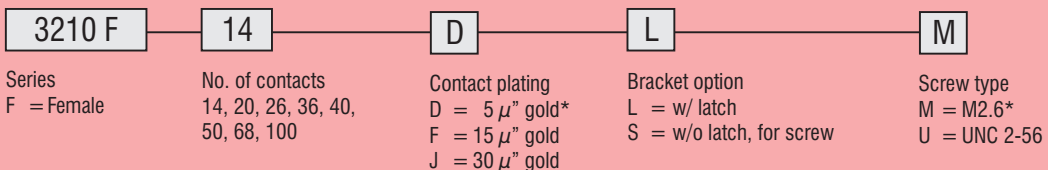

* standard

