49128 Series Dual BNC Female Straight

General specifications	
Insulator material	Polypropylene, UL94-HB
Housing material	PBT w/ glass fiber, UL94V-0
Mounting material	Brass, plating: tin
Contact material	Phosphor bronze, plating: gold
Body material	Zinc alloy, plating: nickel
Frequency range	0 to 1 GHz
Contact resistance	3 mΩ max.
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	1500 VAC for 1 min
Operating temperature	-65 °C to +165 °C
Durability	500 cycles
Soldering	Lead free wave soldering process

RoHS compliant

Mechanical dimensions

Unit: mm

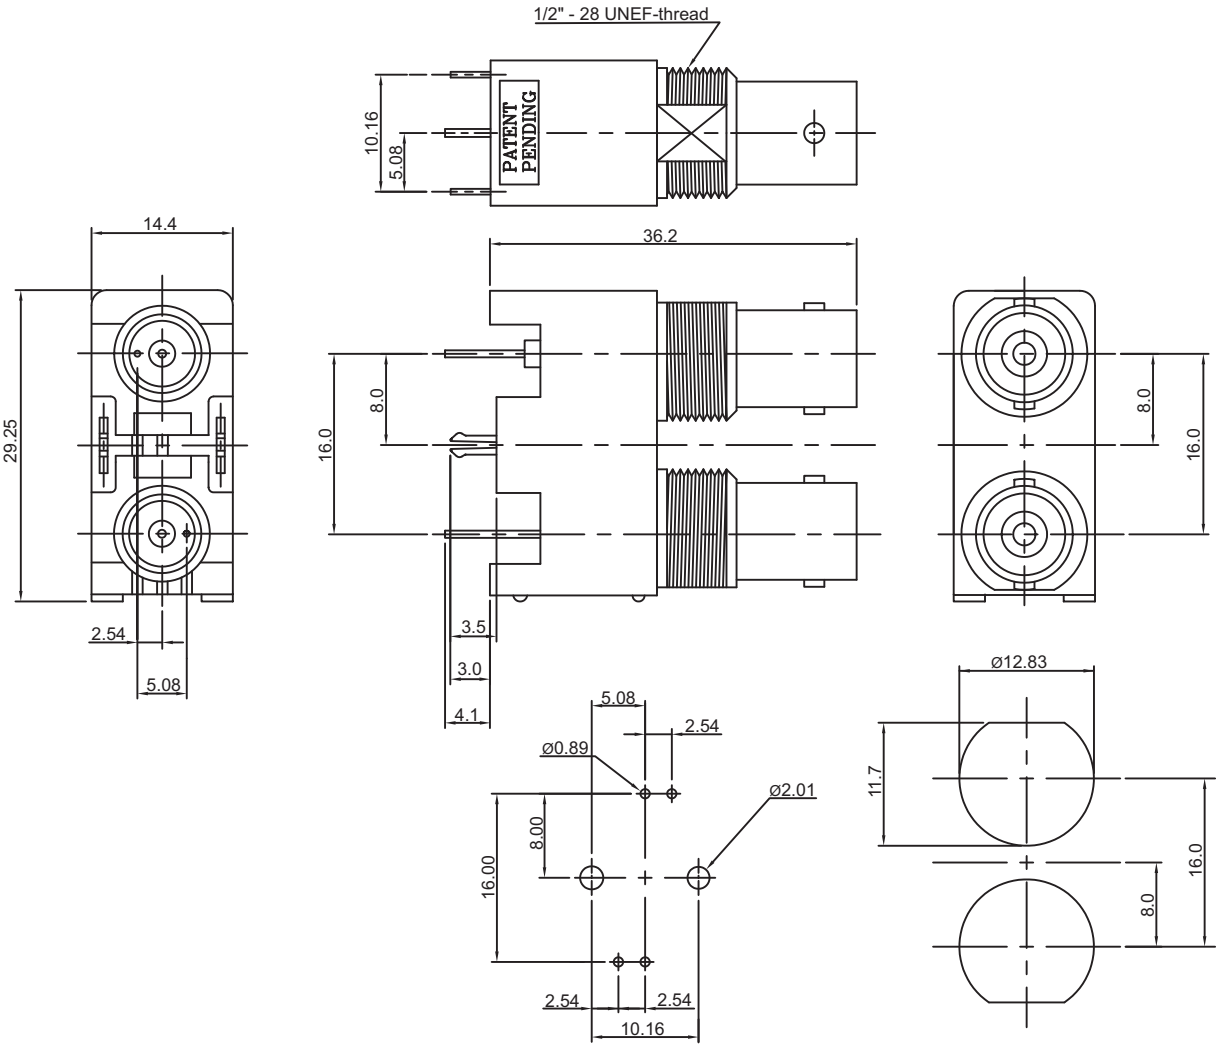

Recommended P.C.B. layout

Panel cut-out

Tolerances		
Linear	.X	± 0.30
	.XX	± 0.10

Part numbering guide

49128	K	50	B
Series	Mounting K = Hook	Impedance 50 = 50 Ω 75 = 75 Ω	Color B = Black W = White

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics