

6492X Series

Multiport RJ45 8P Side Entry Shielded

General specifications

Insulator material	PBT, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	200 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

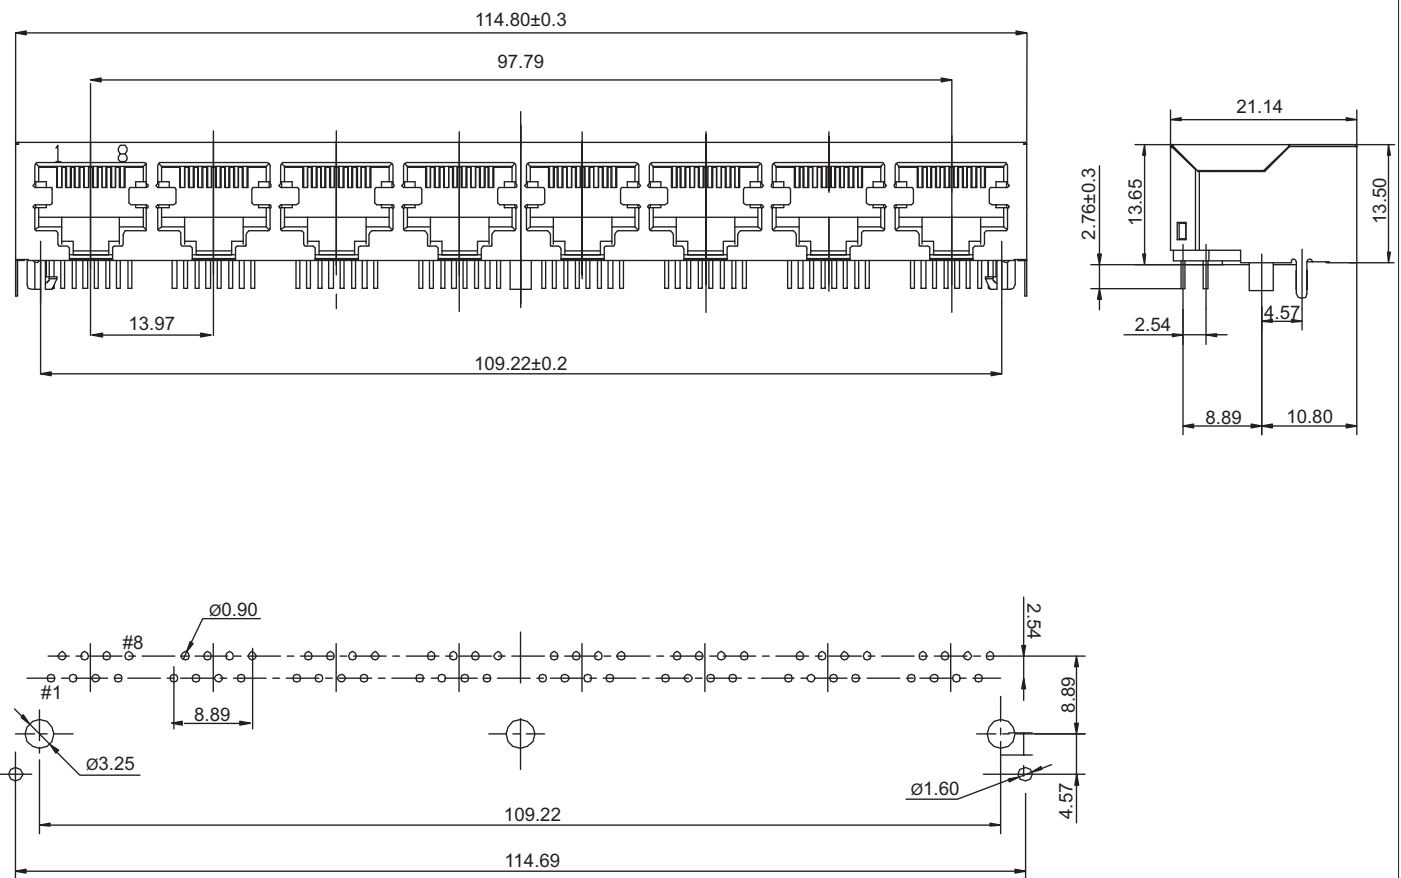

Recommended
P.C.B layout

Tolerances

Linear	X	± 0.25
	.XX	± 0.15
	.XXX	± 0.10

Part numbering guide

6492	H	C
Series	Ports H = 8	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold

* standard

