


2200 Series

2.00 mm AP Pin Header


General specifications	
Insulator material	Nylon 66, UL94V-0, color: nature
Contact material	Brass
Current rating	4 A
Voltage rating	125 V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-30 °C to +105 °C
Soldering	Lead free wave soldering process
Mating parts series	
2200-PT or cable assembly	

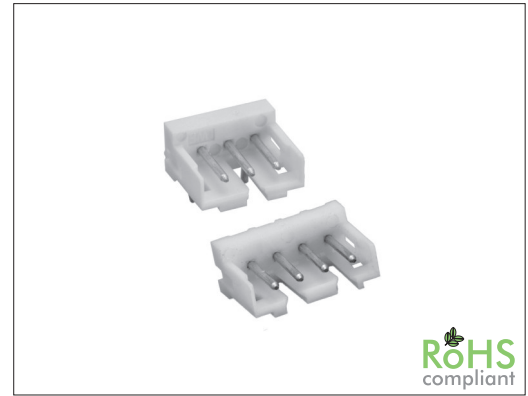



Mechanical dimensions

Unit: mm



2200S

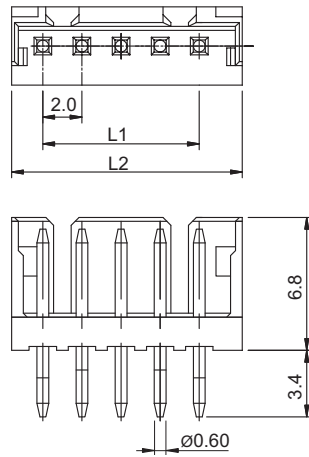




L1 = No. of contacts x 2.00 - 2.00
L2 = No. of contacts x 2.00 + 1.80



2200R



Recommended P.C.B. layout



Tolerances		
Linear	X	± 0.25
	.XX	± 0.12
	.XXX	± 0.08

Part numbering guide

2200 S — **02** — **T**

Series
S = THT straight
R = THT right angle

No. of contacts
02 to 15

Contact plating
T = Tin

* standard

