

3281 Series Centronic Male Straight

General specifications

Insulator material	PBT + 30% glass fiber, UL94V-0
Contact material	Phosphor bronze
Shell	Steel
Current rating	5 A
Insulator resistance	1000 M Ω min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-55 °C to +105 °C
Soldering	Lead free wave soldering process
Mating parts series	






RoHS
compliant

Mechanical dimensions

Unit: mm




3281MxxB0

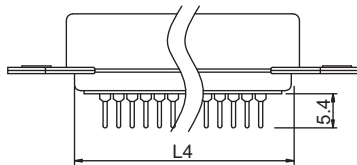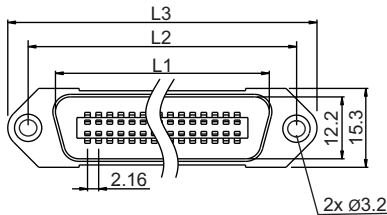

3281M

Contacts	L1	L2	L3	L4
14	25.50	36.00	43.90	22.70
24	36.30	46.80	54.70	33.50
36	49.30	59.70	67.70	46.60
50	64.40	74.90	82.80	61.70

3281NxxB0

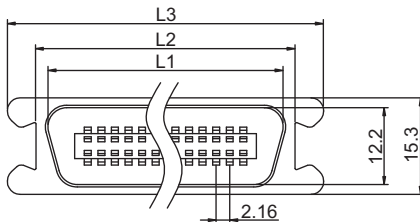


3281N

Contacts	L1	L2	L3	L4
14	25.50	29.40	38.50	21.90
24	36.30	40.20	49.30	32.70
36	49.30	53.50	62.00	45.80
50	64.40	68.30	77.40	61.10

Tolerances

Linear	X	±	Value
	X	±	0.30
	X	±	0.25
	.XX	±	0.15

Part numbering guide

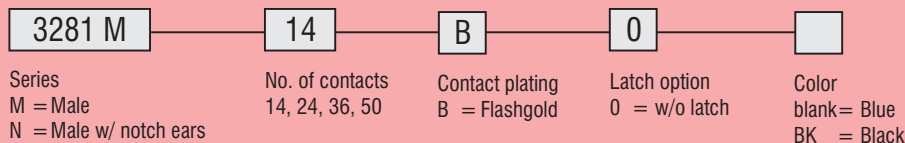

* standard

