

1226 Series


1.27 x 2.54 mm Box Header w/ Spacer

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process





Mating parts series

1290, CA0005 or cable assembly

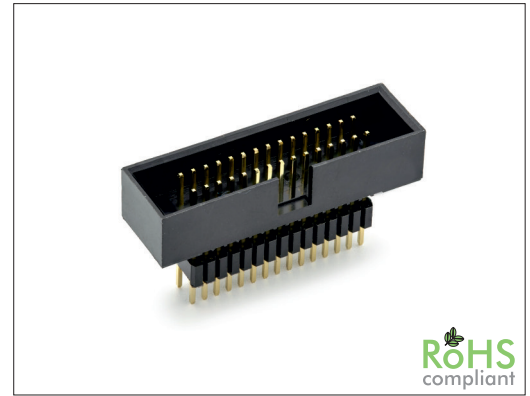

Mechanical dimensions

Unit: mm

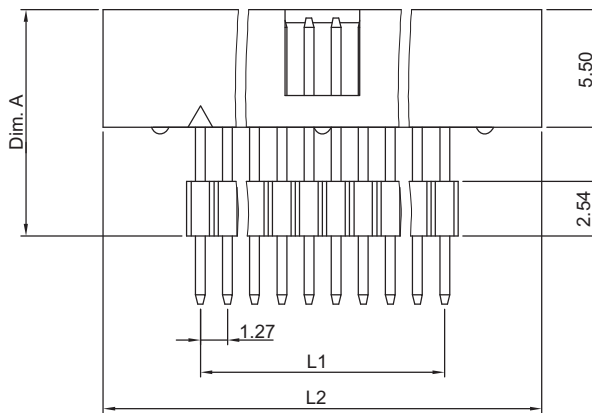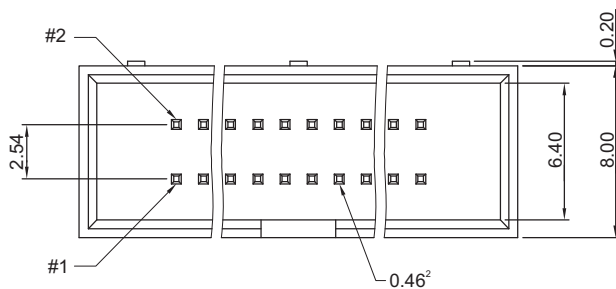

$$L1 = \left(\frac{\text{No. of contacts}}{2} - 1 \right) \times 1.27$$

$$L2 = \left(\frac{\text{No. of contacts}}{2} \right) \times 1.27 + 7.88$$

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

Ordercode dimensions	
Index	Dim. A
00	8.40
01	10.00

other pin length on customer request

Part numbering guide

1226 S — 20 — B — 00

Series
S = THT straight

No. of contacts
10 to 100

Contact plating
B = Flashgold
E = 10 μ" gold
F = 15 μ" gold
J = 30 μ" gold

Dimensions index
see table

* standard

