

# Series 43880 8x RCA Jack / Cinch Top Entry




## Material

Base, insulator: ABS  
 Color washer: PBT + 15% glass fiber  
 Contact break / needle: H65 Brass / QSn 6.5-0.1


## Electrical

Rating: 0.2 Amp @ 50 VDC  
 Contact resistance: 30 mΩ max.  
 Insulator resistance: 100 MΩ min.  
 Dielectrical withstanding: 500 VAC/minute  
 Operating temperature: -40°C ~ +70°C  
 Durability: 500 cycles


43880Z

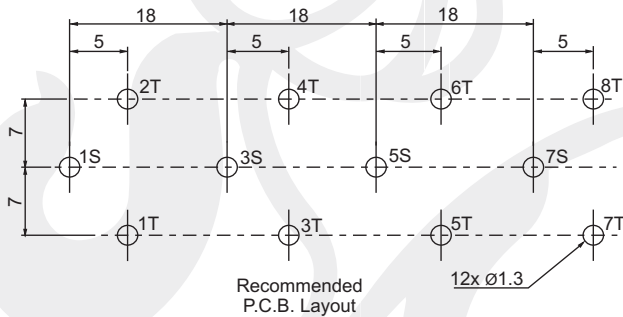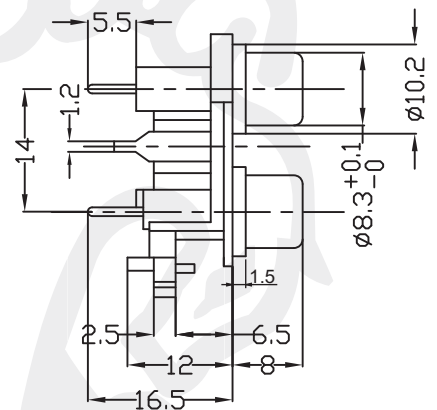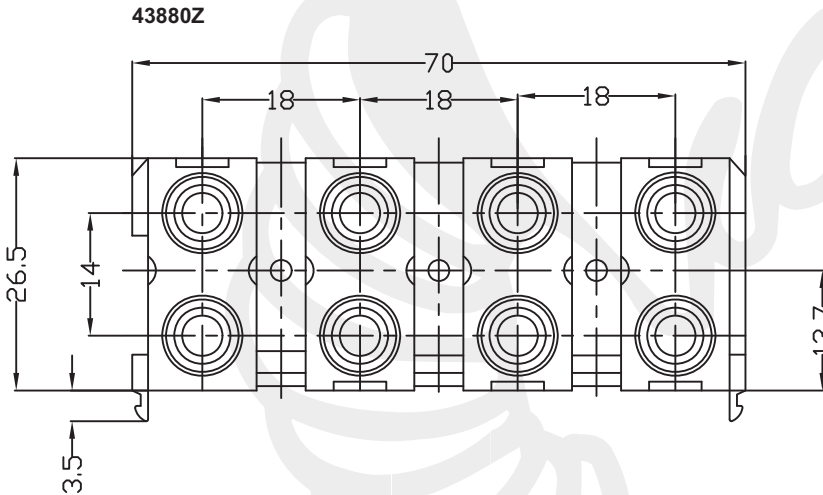

### Color layout



Code	A	B	C	D
	E	F	G	H
01	white red	green red	blue white	red black
02	white red	white red	green black	blue orange
03	t.b.d. by customer			

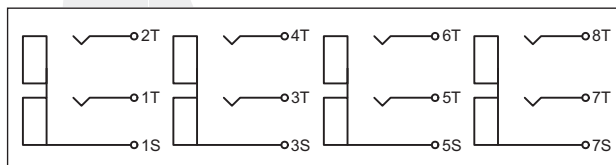

Tolerances	
Linear	<6 ± 0.1 6-20 ± 0.2 >20 ± 0.3



All dim. in mm

**43880 Z** — **01**

Series 43880Z      Color code see table      Packing Box