

# 62140 Series RJ11 / RJ12 Bottom Entry

## General specifications

Insulator material	PA9T, UL94V-0, color: black
Contact material	Phosphor bronze, plating: gold over nickel
Current rating	1 A
Voltage rating	150 VAC
Contact resistance	50 mΩ max.
Insulator resistance	200 MΩ min.
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


## Mating parts series



RoHS  
compliant

## Mechanical dimensions

Unit: mm

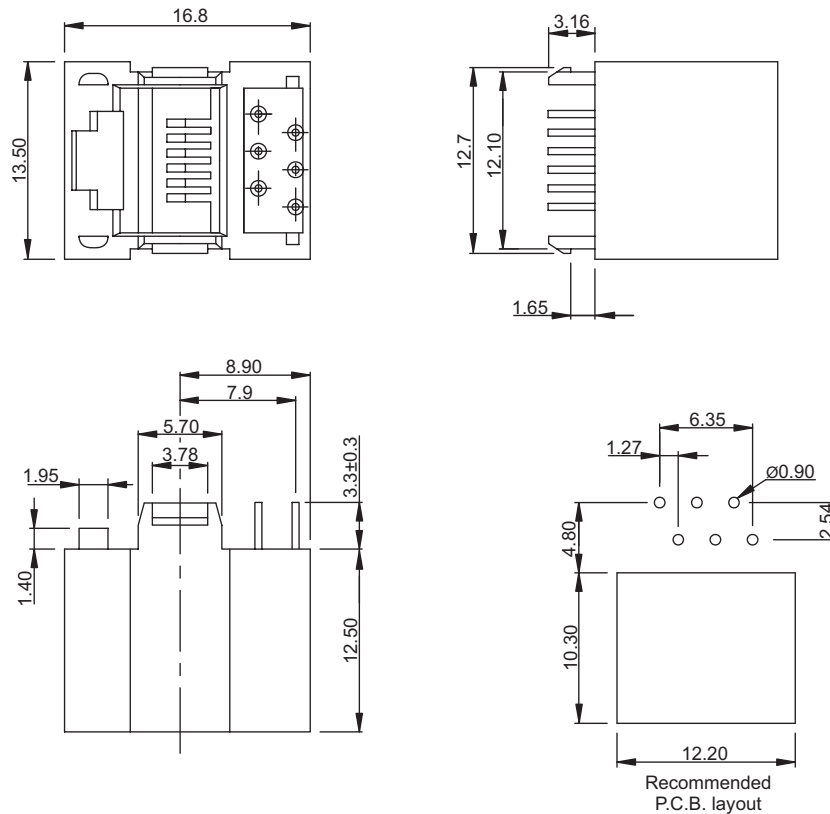

Tolerances		
Linear	X	± 0.25
	.XX	± 0.15

## Part numbering guide

<b>62140</b>	<b>D</b>	<b>4</b>	<b>P</b>
Series RJ11 6P4C RJ12 6P6C	Contact plating C = 3 μ" gold D = 6 μ" gold* F = 15 μ" gold	No. of contacts 4, 6 J = 30 μ" gold K = 50 μ" gold	Board lock P = plastic

\* standard

