

5109 Series

Battery Holder Vertical for CR2032

General specifications

Insulator material	Nylon PA66 w/ glass fiber, UL94V-0
Contact material	Copper alloy, plating: tin
Current rating	3 A
Voltage rating	250 VAC
Contact resistance	30 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-55 °C to +85 °C
Soldering	Lead free wave soldering process


Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

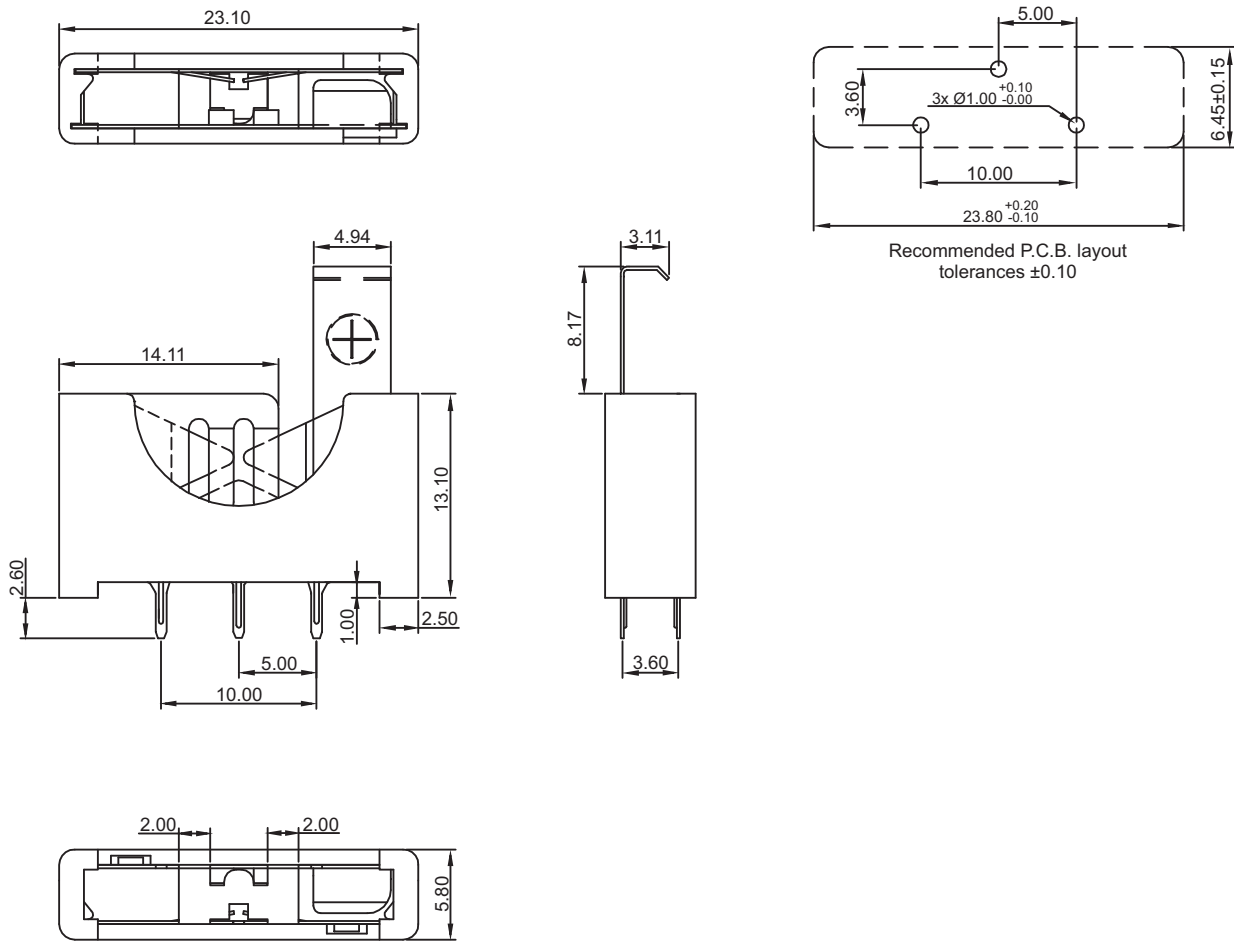

Tolerances		
Linear	X	± 0.40
	.XX	± 0.25

Part numbering guide



* standard

