

Series 43215 2x RCA Jack / Cinch Horizontal

Material

Base, insulator: ABS
 Color washer: PBT + 15% glass fiber
 Contact break / needle: H65 Brass / QSn 6.5-0.1



Electrical

Rating: 0.2 Amp @ 50 VDC
 Contact resistance: 30 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectrical withstanding: 500 VAC/minute
 Operating temperature: -40°C ~ +70°C
 Durability: 500 cycles

43215A




43215B

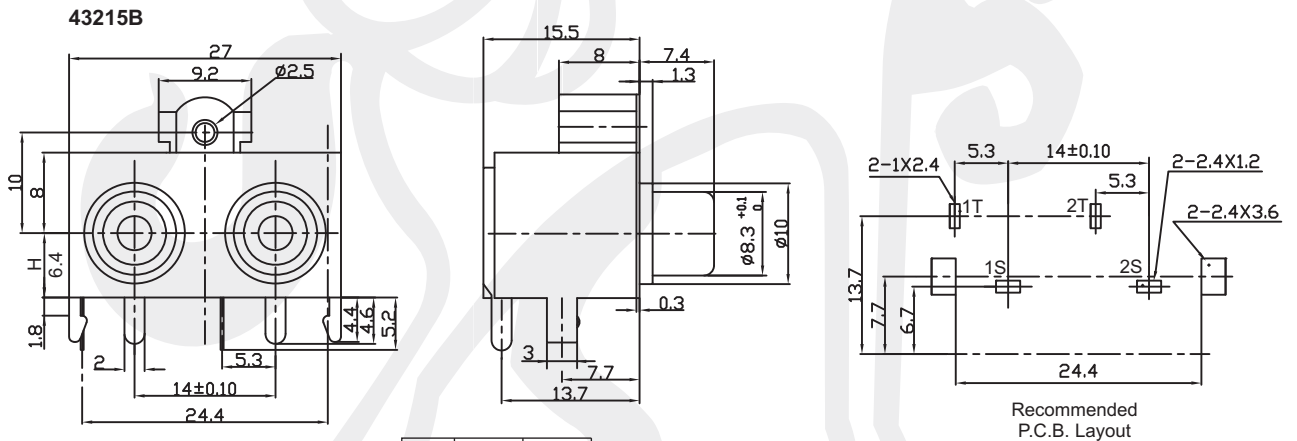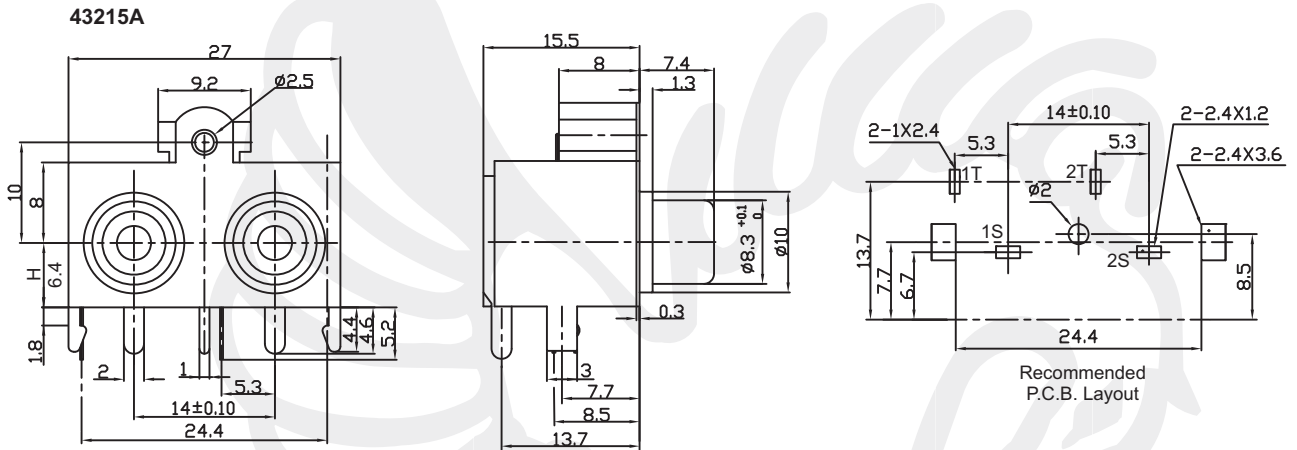

Color layout



| Code | A | B |
|------|--------------------|--------|
| 01 | white | red |
| 02 | red | white |
| 03 | yellow | red |
| 04 | red | yellow |
| 05 | yellow | green |
| 06 | orange | orange |
| 07 | blue | red |
| 08 | green | blue |
| 09 | black | black |
| 10 | yellow | white |
| 11 | t.b.d. by customer | |



| Tolerances | |
|------------|------------|
| Linear | <6 ± 0.1 |
| | 6-20 ± 0.2 |
| | >20 ± 0.3 |



All dim. in mm

43215 A — **01**

Series: 43215A / 43215B
 Color code: see table
 Packing: Box