

67384 Series RJ45 8P LED Board-In Reverse

General specifications

Insulator material	Nylon PA9T, UL94V-0
Contact material	Phosphor bronze, plating: gold
Current / voltage rating	1.0 A / 150 VAC
Contact resistance	50 mΩ max
Insulator resistance	200 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min.
Durability	750 cycles
Operation temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process


Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

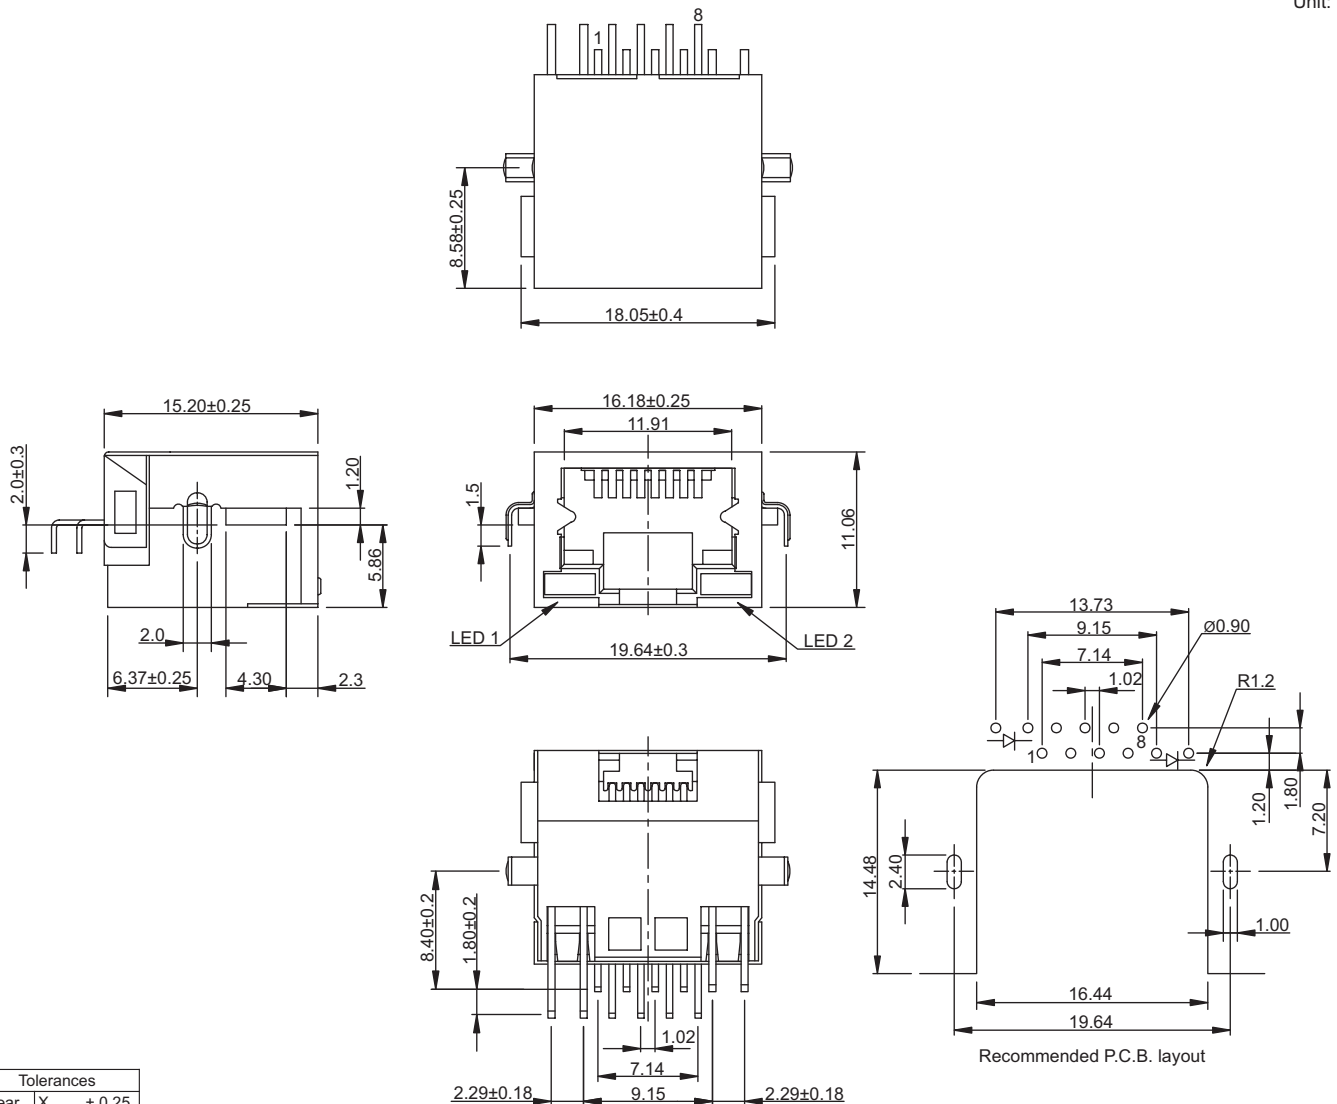

Tolerances

Linear	X	± 0.25
	X	± 0.20
	.XX	± 0.10

Part numbering guide

67384

C

G

Y

Series

Contact plating

C = 3 μ" gold K = 50 μ" gold

D = 6 μ" gold

F = 15 μ" gold

J = 30 μ" gold

Color LED1

D = Green/yellow

G = Green

Y = Yellow

R = Red

Color LED2

N = w/o LED

* standard

