

3099 Series

UNC4-40 Locking Bolt Screw for D-SUB

General specifications

Screw material	Brass, plating: nickel (60 μ" min.)
Burr	0.10 mm max.
Camber	0.10 mm max.
Deformation	0.05 mm max.



Mating parts series





Mechanical dimensions

Unit: mm

3099UX

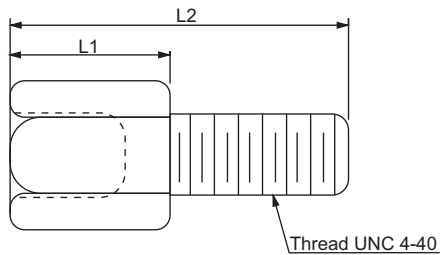


3099U1W

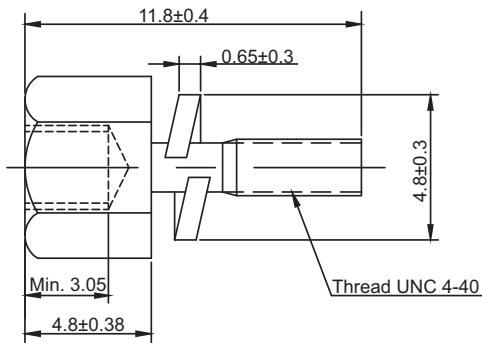

Ordercode dimensions		
Index	L1	L2
1	4.8	11.8
2	4.8	12.7
4	4.8	15.0
7	5.0	9.5
8	5.8	10.5
9	5.8	12.0
10	5.8	13.0

Tolerances		
Linear	X	± 0.25
	.XX	± 0.10
	.XXX	± 0.05

Part numbering guide



Series
U = UNC 4-40

Dimensions index
See table

Spring lock washer
W = w/ spring lock washer (only available for dimensions index 1)

* standard

