

3280 Series Centronic Male Right Angle

General specifications



Insulator material	PBT + 30% glass fiber, UL94V-0
Contact material	Phosphor bronze
Shell	Steel
Current rating	5 A
Insulator resistance	1000 M Ω min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-55 °C to +105 °C
Soldering	Lead free wave soldering process
Mating parts series	




Mechanical dimensions

Unit: mm



3280MxxBA0

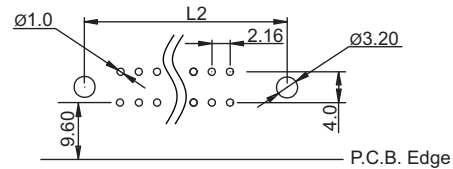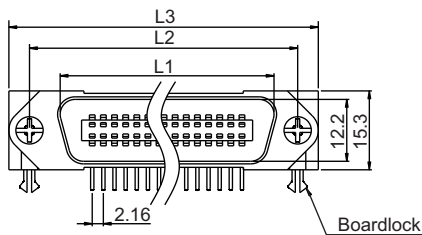


Recommended P.C.B. Layout

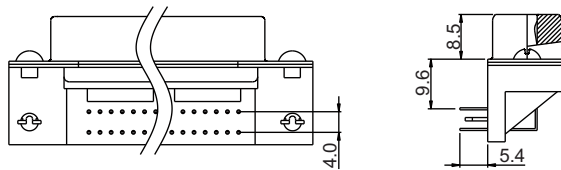

3280MxxBC0

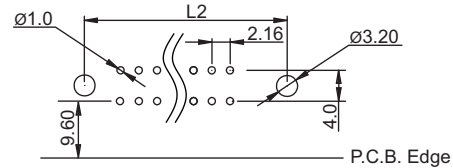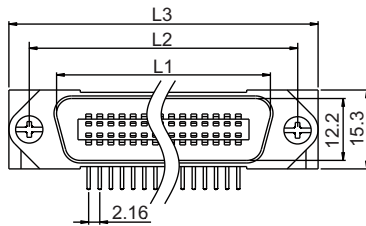

Recommended P.C.B. Layout

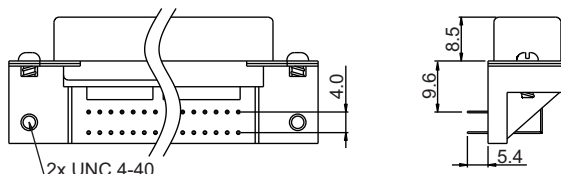

Contacts	L1	L2	L3
14	25.20	36.00	43.90
24	36.30	46.80	54.70
36	49.30	59.70	67.70
50	64.40	74.90	82.80

Tolerances

Linear	X	±	
	X	±	0.30
	X	±	0.25
	.XX	±	0.15

Part numbering guide

3280 M	14	B	A	0	□
Series M = Male	No. of contacts 14, 24, 36, 50	Contact plating B = Flashgold	Mounting option A = Screw w/ boardlock C = Screw w/ L-shape	Latch option 0 = w/o latch	Color blank = Blue BK = Black

* standard

