


# 3930 Series

# IEEE 1394 Plug 4 Pin for Cable

## General specifications

Insulator material	High temperature thermoplastic, UL94V-0
Contact material	Copper alloy
Current rating	0.5 A
Contact resistance	50 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	100 VAC for 1 min
Operating temperature	-55 °C to +85 °C
Durability	1000 cycles
<b>Mating parts series</b>	

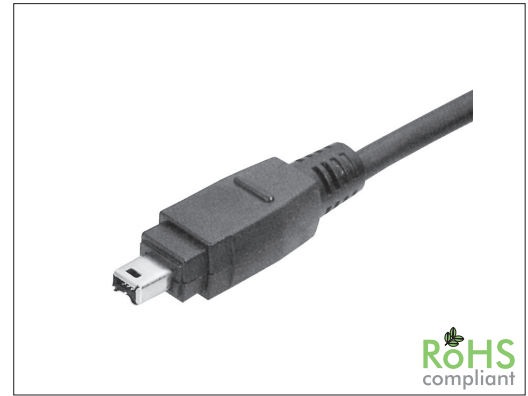


RoHS  
compliant


## Mechanical dimensions

Unit: mm




### Housing w/ terminal

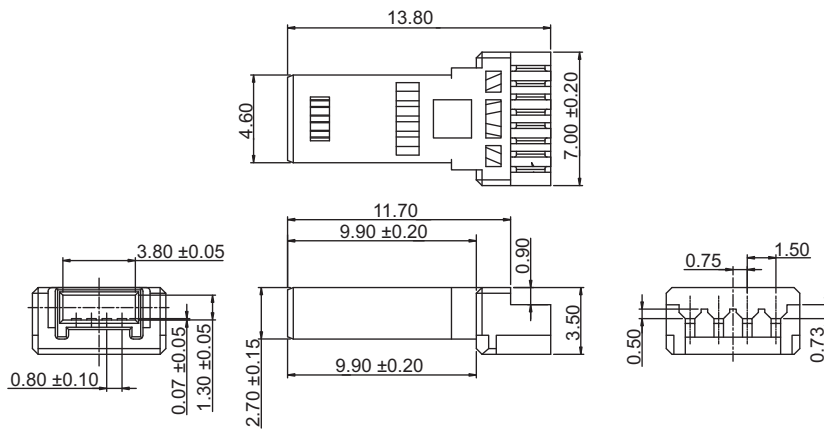

### Front shell

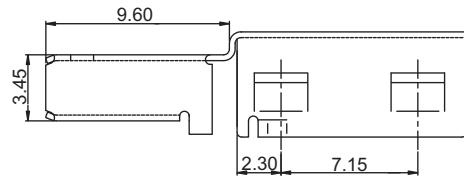

### Rear shell

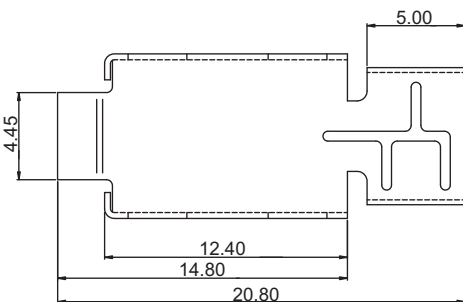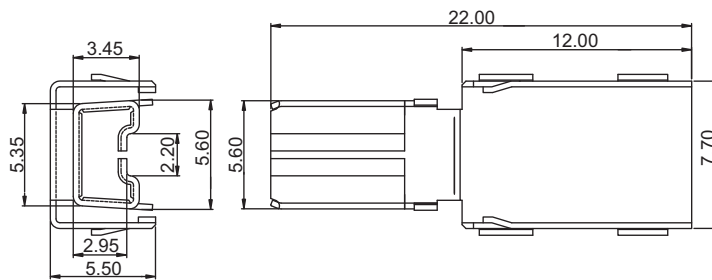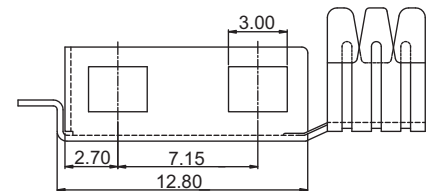

### Tolerances

Linear	± 0.30
--------	--------

## Part numbering guide

3930	F	J	B	0
Series	Contact plating	Color	Packing	
F = Plug female	J = 30 μ" gold*	B = Black	0 = Bulk	

\* standard

