


# 2206 Series

# 2.00 mm PAD Pin Header w/ Lock Dual Row


General specifications	
Insulator material	PBT w/ glass fiber, UL94V-0, color: white
Contact material	Brass
Current rating	3 A
Voltage rating	250 VAC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ @ 500 VDC
Dielectrical withstanding	800 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Soldering	Lead free wave soldering process
Mating parts series	
2206-PT or cable assembly	

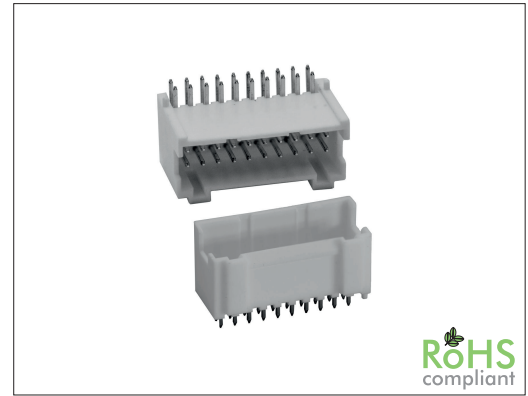


## Mechanical dimensions

Unit: mm

### 2206S

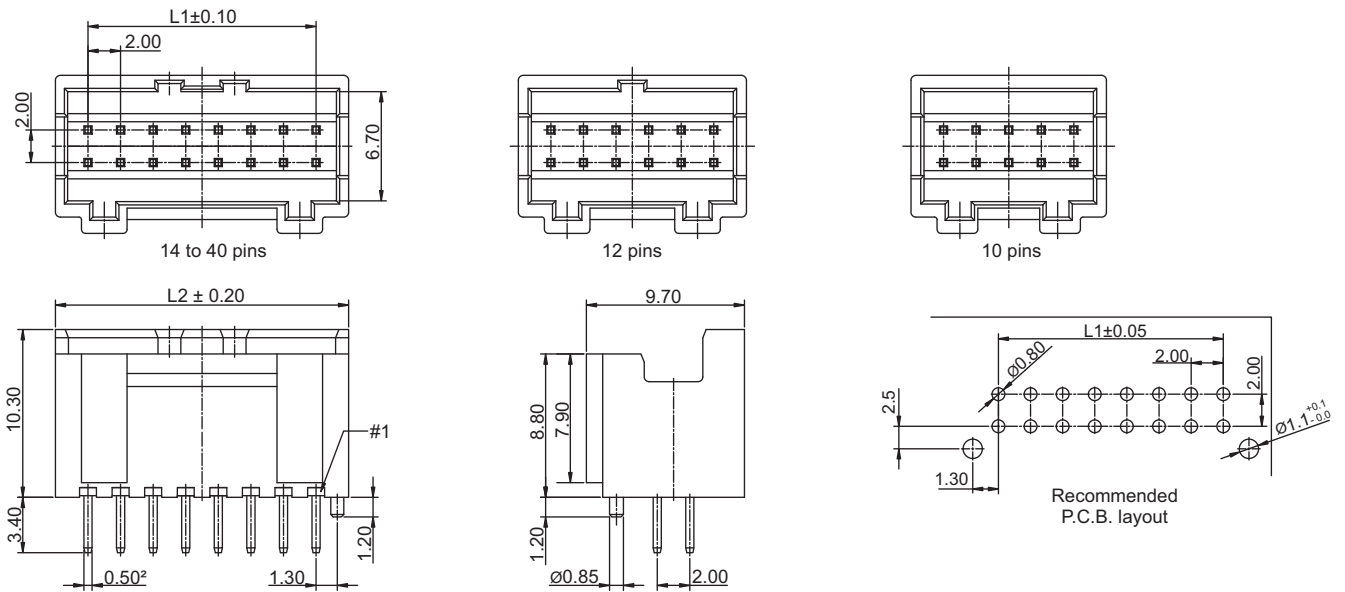


### 2206R

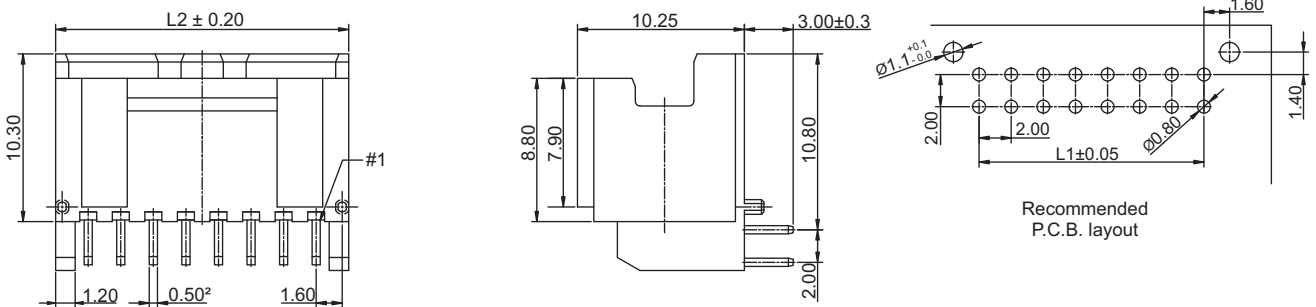

Tolerances		
Linear	X	± 0.25
	.XX	± 0.12
	.XXX	± 0.08

L1 = No. of contacts - 2.00  
L2 = No. of contacts + 2.00

## Part numbering guide

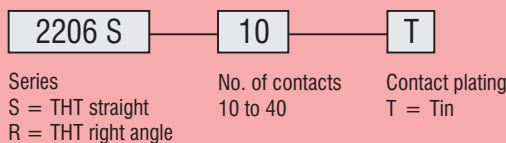

\* standard

