


Specifications	
Contact rating	0.4 VA max. @ 28 V AC / DC
Durability	10000 cycles at full load
Contact resistance	100 mΩ max. initial @ 3 VDC, 100 mA
Insulator resistance	500 MΩ min.
Dielectrical withstanding	250 VAC
Operation temperature	-20 °C to +85 °C
Materials	
Case and frame	Nylon 4/6
Actuator	Nylon
Terminal	Copper alloy, plating: see order code
Contact	Copper alloy, plating: silver
Loop sealing	Rubber




Part numbering guide

S **W** - **U** **T** - **4** - **T** **2** **C** **K** - **2** - - **H**


Switches Function		Actuator		Termination		Contact Plating		Actuator Color		Case Color	
UT-4	SP on-none-on	T2	3.80	C	straight	K	gold / tin (std.)	1	white	□	: white (std.)
UT-4A	SP on-off-on			S	straight, snap-in	R	gold	2	black	■	: black
UT-5	DP on-none-on			H	horizontal						
UT-5A	DP on-off-on			V	vertical						
										RoHS Code	
										H = RoHS Compliant	

Straight type

SPDT




Model No.	Switching position		
	ON	none	ON
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1

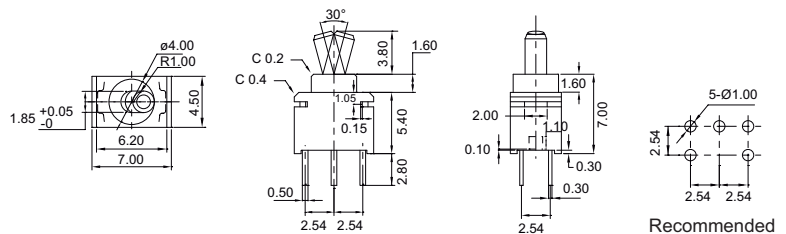


SW-UT-4-T2CK-2

DPDT



Model No.	Switching position		
	ON	none	ON
UT-5	ON	none	ON
UT-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4


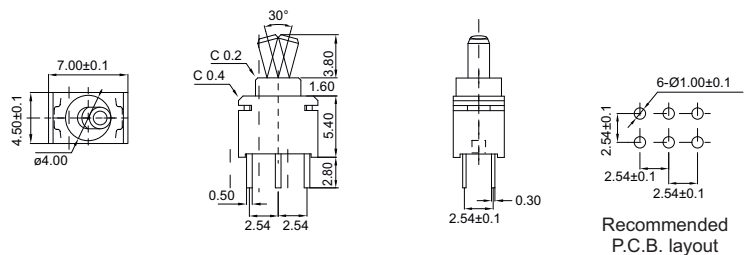


SW-UT-5-T2CK-2







Right angle horizontal type

SPDT




Model No.	Switching position		
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1







Recommended P.C.B. layout

SW-UT-4-T2HK-2

DPDT



Model No.	Switching position		
UT-5	ON	none	ON
UT-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4




Recommended P.C.B. layout





SW-UT-5-T2HK-2

Right angle vertical type

SPDT




Model No.	Switching position		
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1







Recommended P.C.B. layout

SW-UT-4-T2VK-2

DPDT



Model No.	Switching position		
UT-5	ON	none	ON
UT-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4



Recommended P.C.B. layout

SW-UT-5-T2VK-2

