


# 0201 Series

# Micro SD SMT Push-Push

## General specifications

Insulator material	High temperature plastic, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	0.5 A
Voltage rating	100 V AC/DC
Contact resistance	100 mΩ max.
Insulator resistance	1000 MΩ @ 250 VDC
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Durability	5000 cycles
Soldering	JEDEC lead free reflow soldering process



## Mating parts series

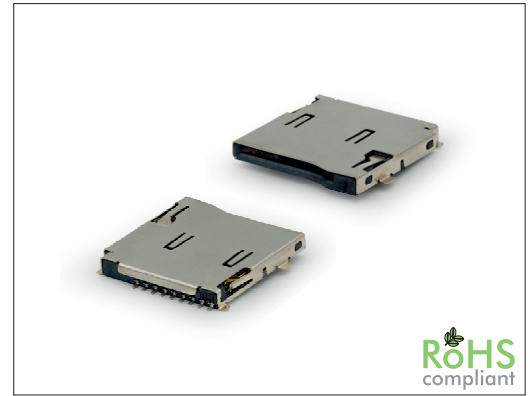

RoHS  
compliant


## Mechanical dimensions

Unit: mm

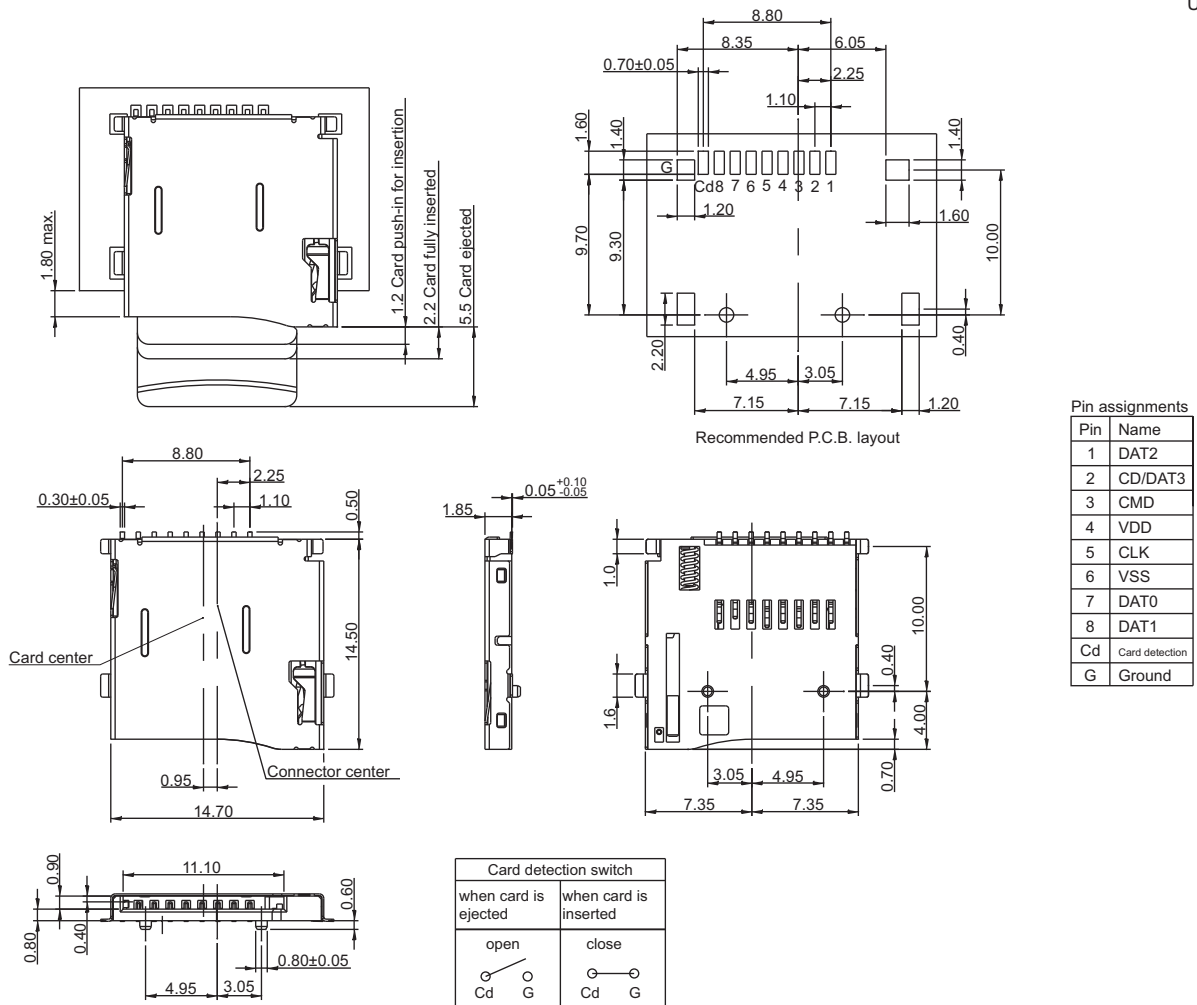

Linear	X	±	
	X	±	0.5
	X	±	0.3
	.XX	±	0.2

## Part numbering guide

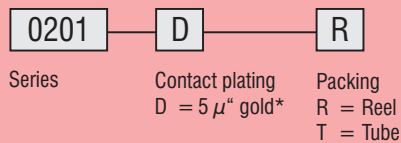

\* standard

