

67212 Series

SMT RJ45 8P LED Side Entry Shielded

General specifications


Insulator material	PA9T, UL94V-0, color: black
Contact material	Phosphor bronze, plating: gold
Current rating	1.0 A
Voltage rating	150 VAC
Contact resistance	50 mΩ max.
Insulator resistance	200 MΩ min.
Operating temperature	-40 °C to +85 °C
Soldering	JEDEC lead free reflow soldering process
Durability	750 cycles

Mating parts series



Mechanical dimensions

Unit: mm

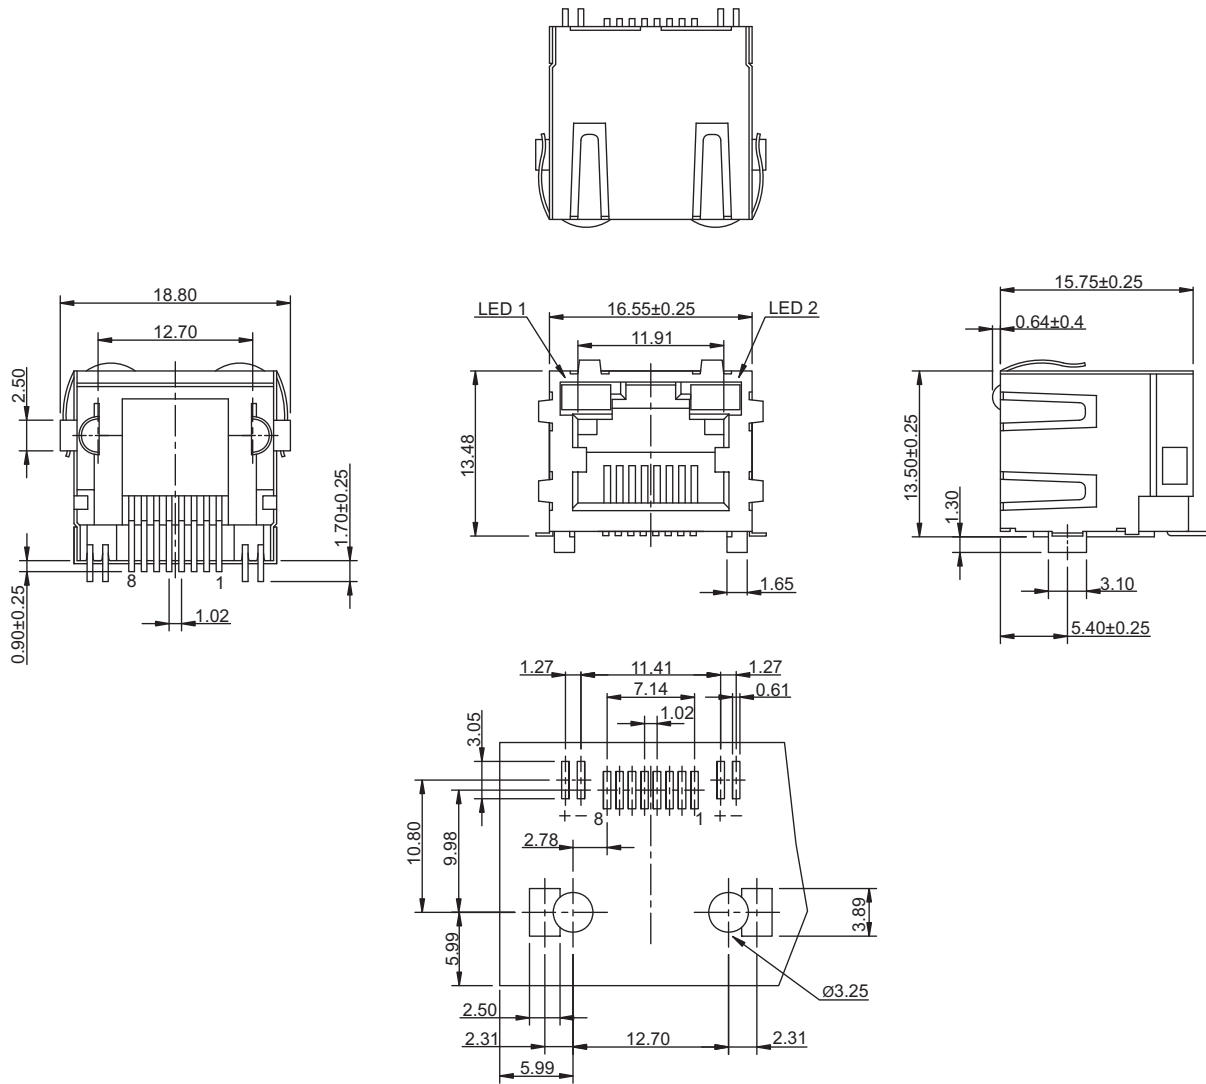

Recommended P.C.B. layout

Tolerances	
Linear	X ± 0.20
	.XX ± 0.15

Part numbering guide

67212	C	G	Y	0
Series	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold J = 30 μ" gold	K = 50 μ" gold	Color LED1 D = Green/Yellow G = Green R = Red Y = Yellow	Color LED2
				Ground spring 0 = w/o spring 1 = top spring 2 = side spring 3 = top and side spring

* standard

