

# 1476 Series


# 2.00 mm SMT Female Header Dual Row

## General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	2 A
Voltage rating	250 VAC
Contact resistance	20 mΩ max.
Insulator resistance	3000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process

## Mating parts series


1320, 1334, 1420, 1422, 1434, 1435

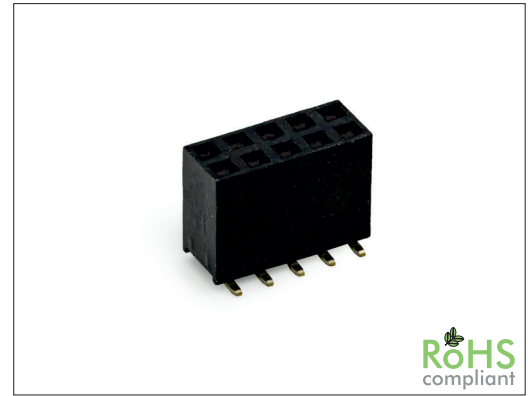

RoHS  
compliant

## Mechanical dimensions

Unit: mm

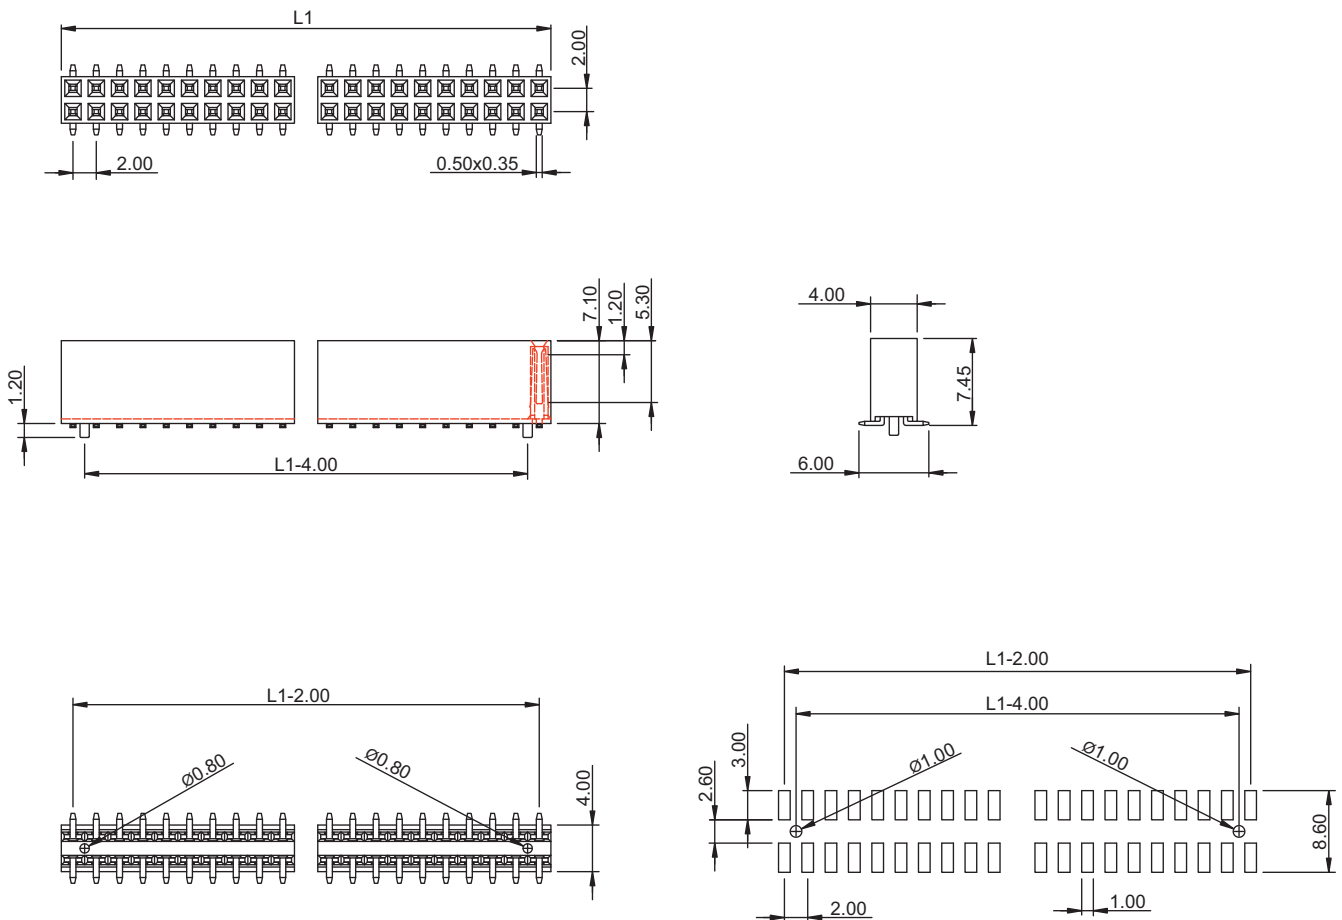

Recommended P.C.B. layout

Tolerances		
Linear	X	± 0.30
	.XX	± 0.20
	.XXX	± 0.10

L1 = No. of contacts x 1.00

## Part numbering guide

1476 V — 06 — B — 0 — R

Series	No. of contacts	Contact plating	Position pegs	Packing with pick & place pad
V = SMT vertical	06 to 80	B = Flashgold E = 10 μ" gold F = 15 μ" gold J = 30 μ" gold	0 = w/o pos. pegs 1 = w/ pos. pegs	R = Reel T = Tube

\* standard

