


# 2207 Series

# 2.00 mm IL Housing and Terminal

### General specifications


Insulator material	Nylon 66, UL94V-0, color: yellow
Contact material	Phosphor bronze, plating: tin
Current rating	3 A
Voltage rating	300 V AC/DC
Contact resistance	20 mΩ max.
Insulator resistance	100 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-25 °C to +85 °C
<b>Mating parts series</b>	
2207-R, 2207-S	

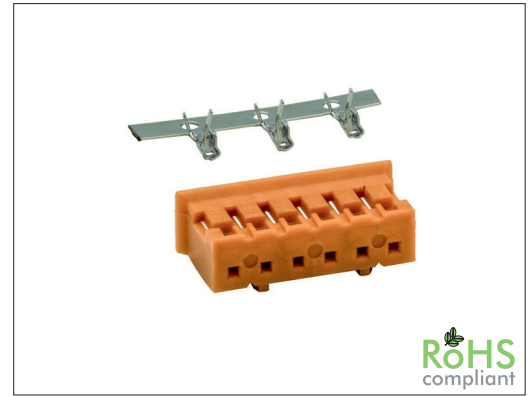


### Mechanical dimensions

Unit: mm




#### 2207P

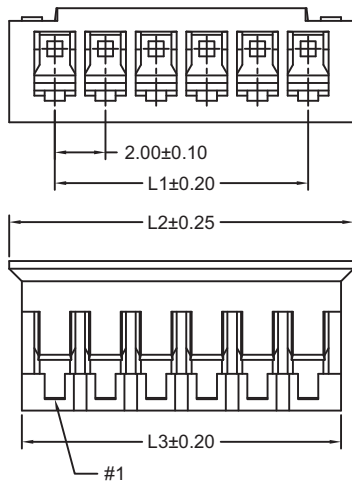

L1 = No. of contacts x 2.00 - 2.00  
 L2 = No. of contacts x 2.00 + 1.60  
 L3 = No. of contacts x 2.00 + 0.60

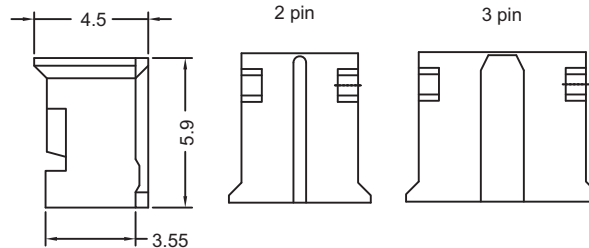

#### 2207T

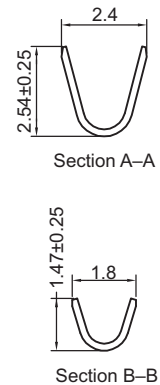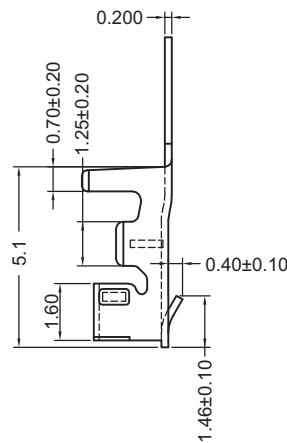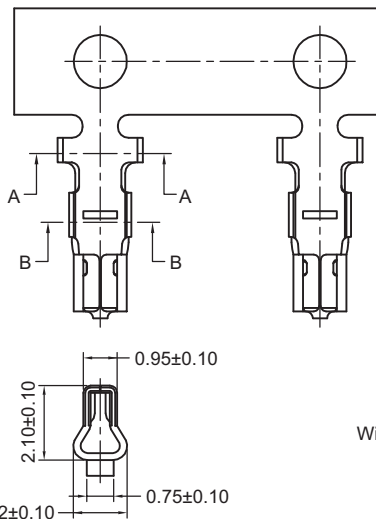

Wire range: AWG 24 to 28

Tolerances		
Linear	X	± 0.25
	.XX	± 0.15
	.XXX	± 0.05

### Part numbering guide

2207 P

02

Series  
 P = Housing  
 T = Terminal

No. of contacts  
 02 to 15  
 (leave blank for terminal)

\* standard

