


# 62702 Series

# Dual RJ11 / RJ12 Side Entry Low Profile

### General specifications


Insulator material	PBT, UL94V-0
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	35 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles

### Mating parts series

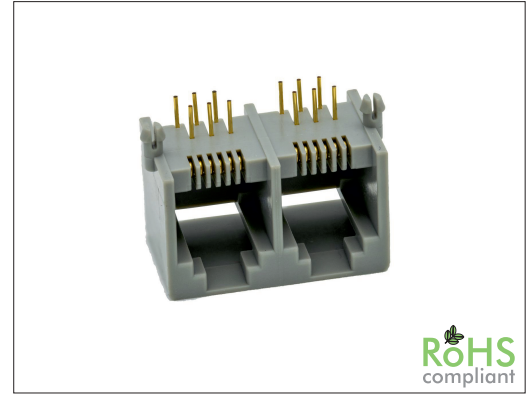


### Mechanical dimensions

Unit: mm

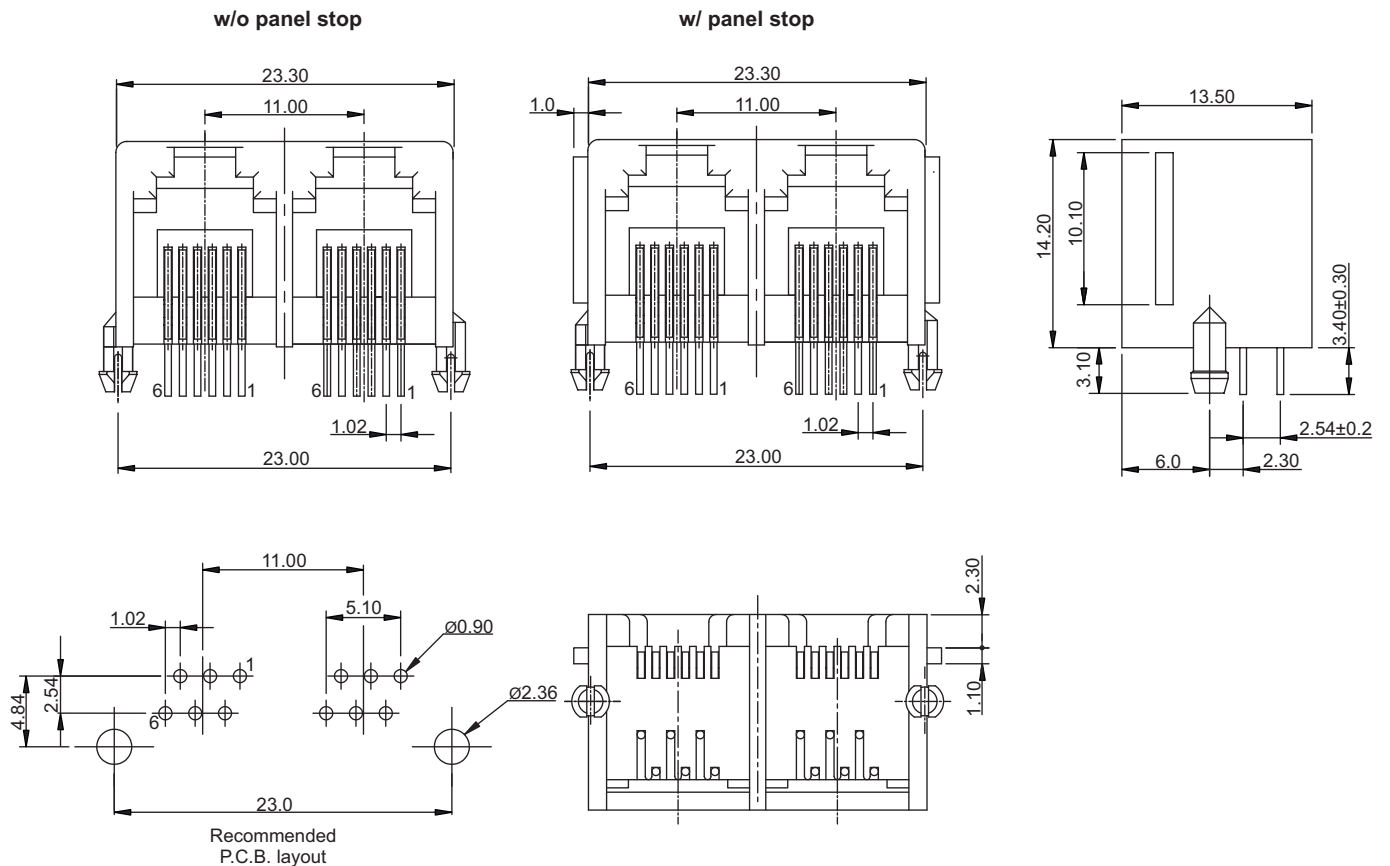

Tolerances		
Linear	X	± 0.25
	.XX	± 0.13
	.XXX	± 0.05

### Part numbering guide

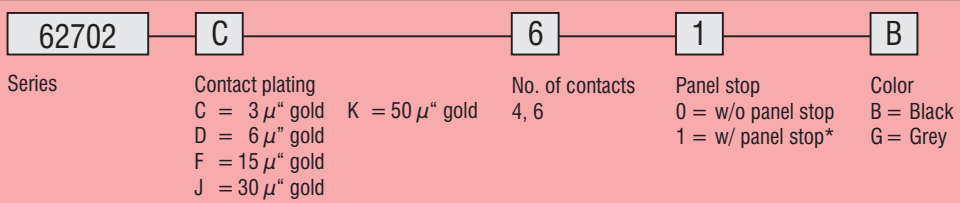

\* standard

