

1114 Series


1.27 x 1.27 mm Board Spacer Right Angle Dual Row

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process





Mating parts series

1134, 1135, 1136, 1182, 1184, 1188

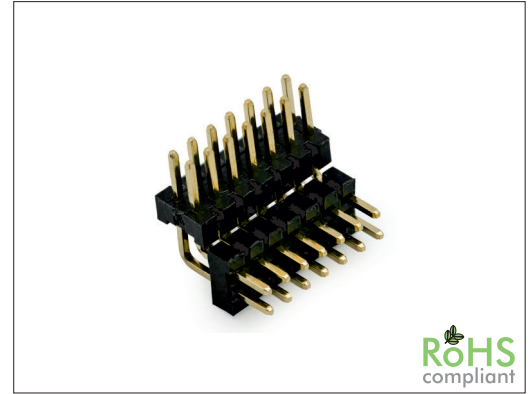

Mechanical dimensions

Unit: mm

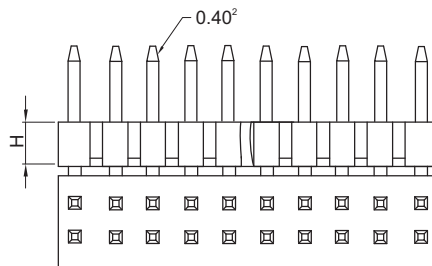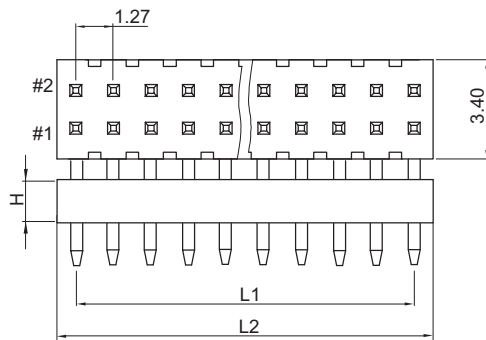

$$L1 = \left(\frac{\text{No. of contacts}}{2} - 1 \right) \times 1.27$$

$$L2 = \left(\frac{\text{No. of contacts}}{2} \right) \times 1.27$$

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

Ordercode dimensions				
Index	Dim. A	Dim. B	Dim. C	Dim. D
00	3.00	3.00	5.00	5.00
01	3.00	3.00	3.50	3.50

Other pin length on customer request

Part numbering guide

1114 R	06	B	3	00
Series R = THT right angle	No. of contacts 06 to 50	Contact plating B = Flashgold E = 10 μ ⁿ gold F = 15 μ ⁿ gold J = 30 μ ⁿ gold	Body height H 1 = 1.00 mm 2 = 1.50 mm 3 = 2.00 mm*	Dimensions index see table

* standard

