

2204 Series


2.00 mm SHR SMT Pin Header Dual Row

General specifications

Insulator material	Polyester, UL94V-0, color: natural
Contact material	Brass
Current rating	2 A
Voltage rating	125 V AC/DC
Contact resistance	20 mΩ max.
Insulator resistance	3000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process


Mating parts series

2204-I or cable assembly






Mechanical dimensions

Unit: mm

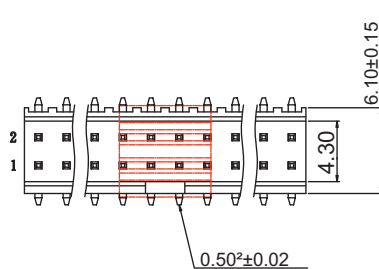

L1 = No. of contacts - 2.00
L2 = No. of contacts

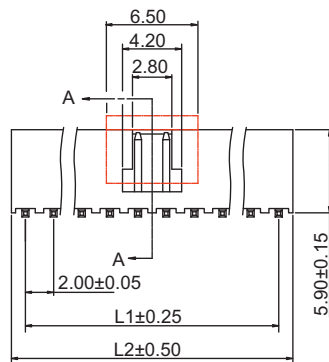

Recommended P.C.B. layout
Tolerances ±0.05

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

Part numbering guide

2204 V	08	T	R	
Series V = SMT vertical	No. of contacts 08 to 34	Contact plating T = Tin B = Flashgold E = 10 μ" gold F = 15 μ" gold	Packing R = Reel T = Tube	Option B = Housing color black

* standard

