

1182 Series


1.27 x 1.27 mm SMT Female Header Dual Row Dual Entry

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process


Mating parts series

1104, 1112, 1114, 1152, 1153, 1157, 1158, 1162, 1163

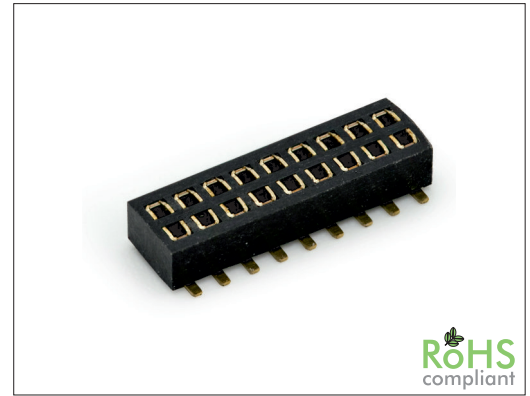

Mechanical dimensions

Unit: mm

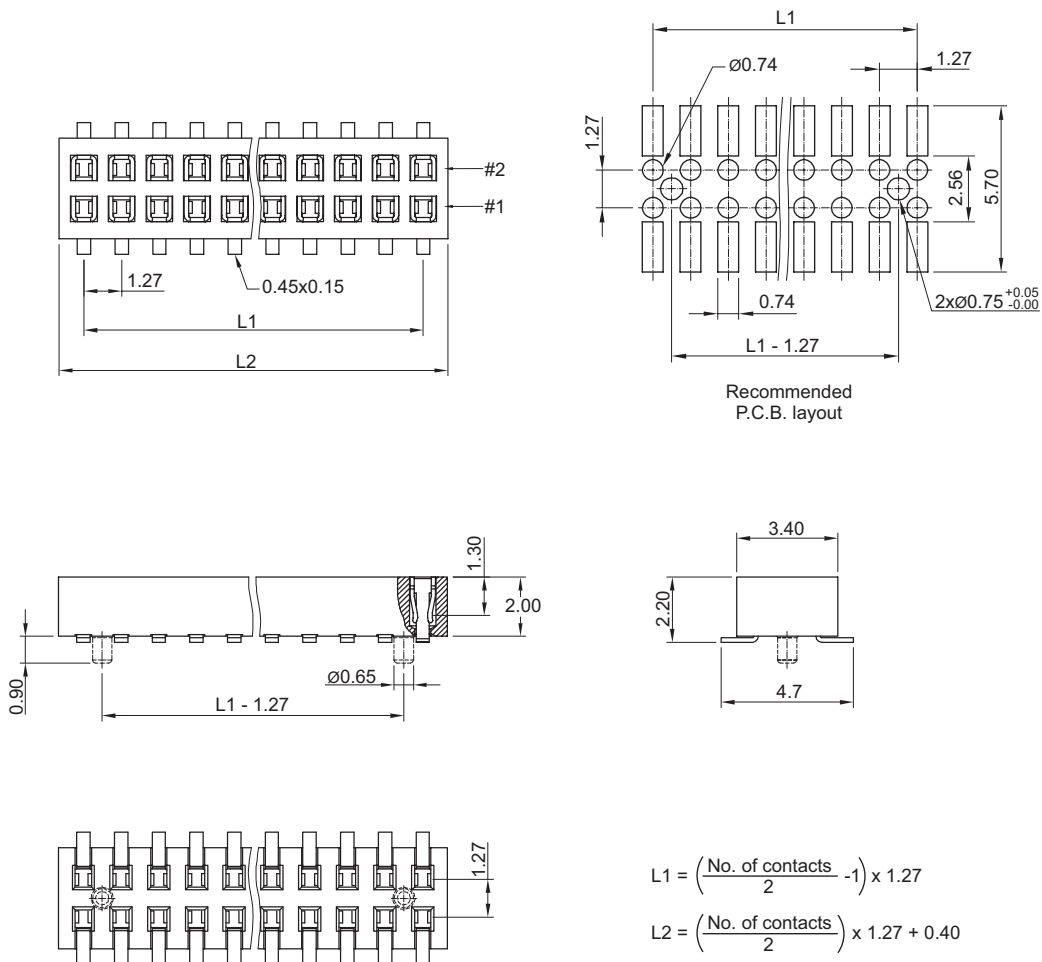

Tolerances

Linear	X	± 0.50
	.XX	± 0.25

Part numbering guide

1182 V	04	B	0	R
Series V = SMT vertical	No. of contacts 04 to 100	Contact plating B = Flashgold E = 10 μ" gold F = 15 μ" gold J = 30 μ" gold	Position peg 0 = w/o pos. peg 1 = w/ pos. peg	Packing with pick & place pad R = Reel T = Tube

* standard

