

1370 Series


2.00 mm Female Header Dual Row

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	2 A
Contact resistance	20 mΩ max.
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to 105 °C
Soldering	Lead free wave soldering process

Mating parts series


1320, 1334, 1420, 1422, 1434, 1435

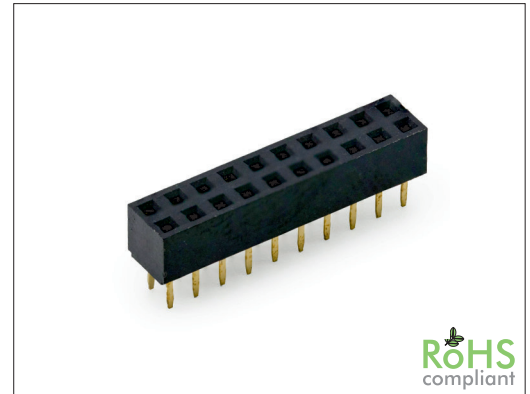

RoHS
compliant

Mechanical dimensions

Unit: mm

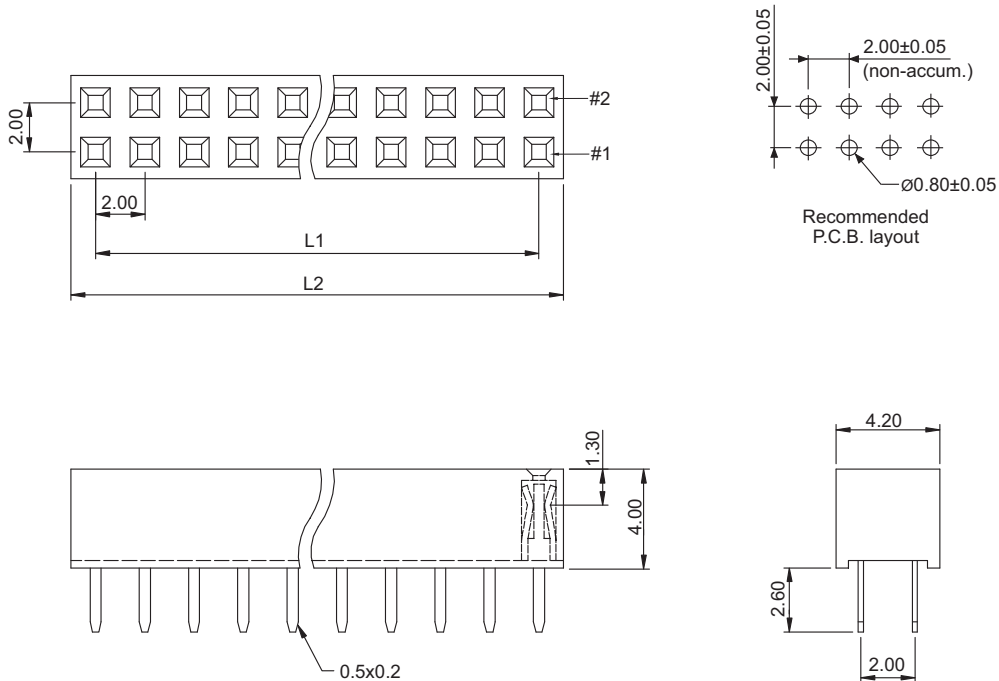

$$L1 = \left(\frac{\text{No. of contacts}}{2} - 1 \right) \times 2.00$$

$$L2 = \left(\frac{\text{No. of contacts}}{2} \right) \times 2.00$$

Tolerances	
Linear	X ± 0.38
	.XX ± 0.25

Part numbering guide

1370 S — 04 — B

Series
S = THT straight

No. of contacts
04 to 80

Contact plating
B = Flashgold
E = 10 μ" gold
F = 15 μ" gold
J = 30 μ" gold

* standard

