


3124 Series

D-Sub High Power C5W5 Right Angle 20/40 A

General specifications


Insulator material	Glass filled polyester, UL94V-0, color: black
Contact material	Copper alloy
Shell material	Steel, plating: tin
Lock link	Copper alloy, plating: tin over nickel
Power contact resistance	2.7 mΩ max.
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-55 °C to +125 °C
Durability	100 cycles

Mating parts series

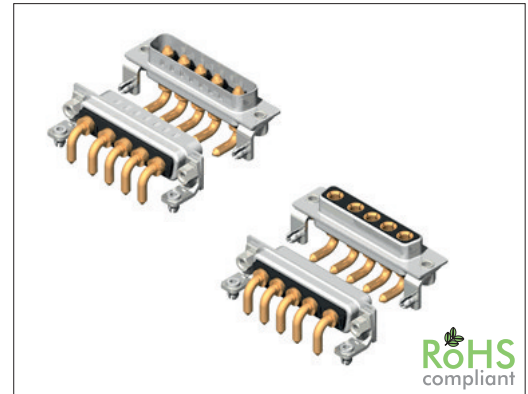


Mechanical dimensions





Unit: mm

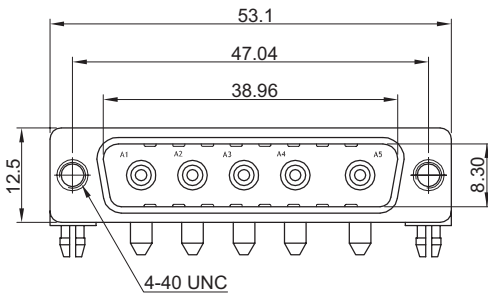


**3124M
20 Amp**

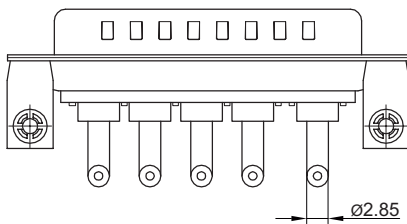

**3124M
40 Amp**

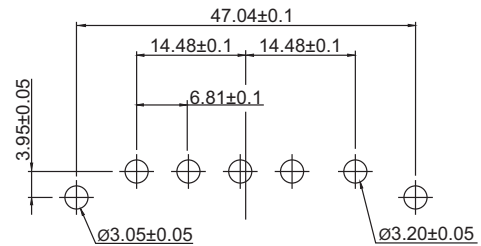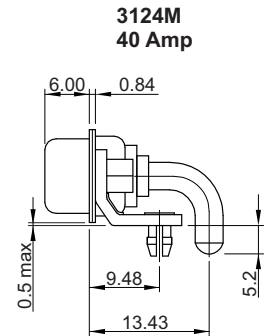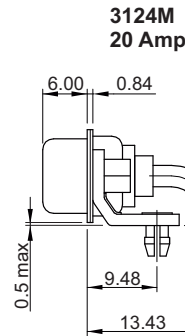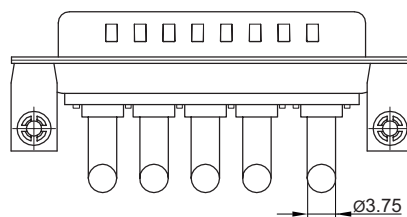

Recommended P.C.B. Layout

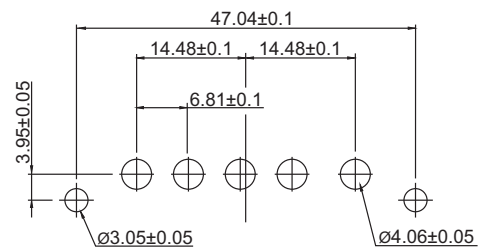

Recommended P.C.B. Layout

Tolerances

Linear	X	± 0.30
	XX	± 0.20
	XXX	± 0.10

continued on page 2

Part numbering guide

3124 F

20

B

0

0

Series
F = Female
M = Male

Power contacts
20 = 20 A
40 = 40 A

Power contact plating
B = Flashgold
F = 15 μ^a gold
J = 30 μ^a gold

Signal contact plating
0 = w/o signal
contact




Mounting type
0 = w/o screws
B = w/ rivited front bolts 4.0 mm
C = w/ rivited rear bolts 4.0 mm
I = w/ ground tabs 3.2 mm
L = tabs w/ boadlock

* standard





Mechanical dimensions

Unit: mm

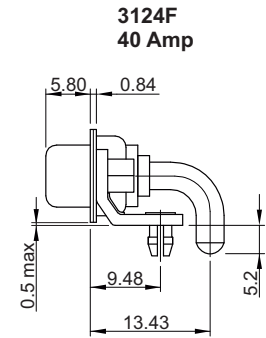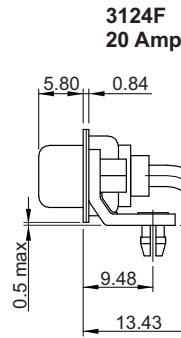
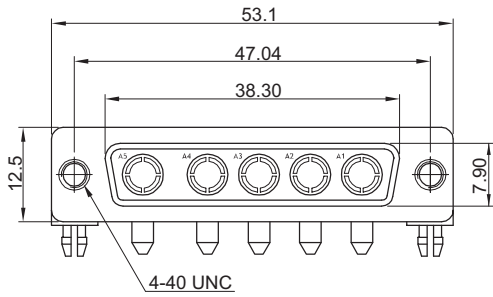


**3124F
20 Amp**

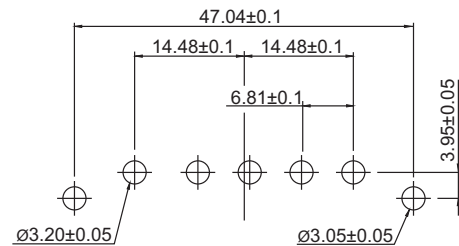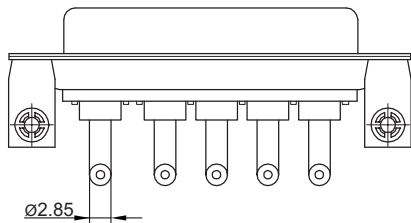

Recommended P.C.B. Layout

**3124F
40 Amp**

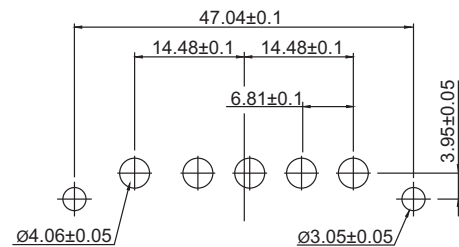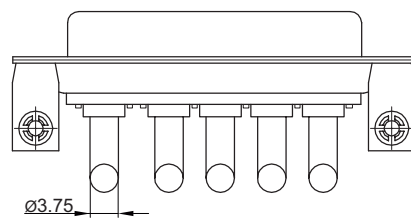

Recommended P.C.B. Layout

Type 0 (w/ $\varnothing 3.05$ holes)	Type B (w/ rivited front bolts)	Type C (w/ rivited rear bolts)	Type I (w/ ground tabs)	Type L (tabs w/ lock)

Tolerances	
Linear	X ± 0.30
	.XX ± 0.20
	.XXX ± 0.10

