


64204 Series

SMT RJ45 8P Side Entry Front Shielded

General specifications

Insulator material	LCP, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	JEDEC lead free reflow soldering process
Durability	750 cycles


Mating parts series

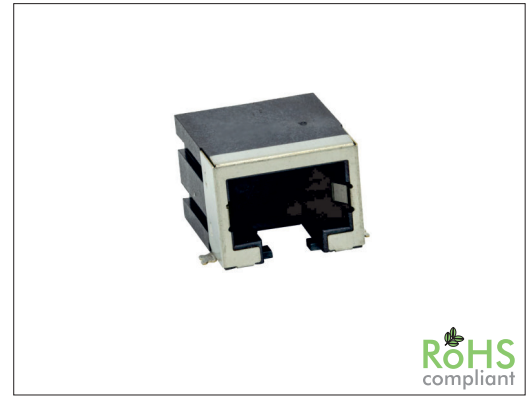

RoHS
compliant

Mechanical dimensions

Unit: mm

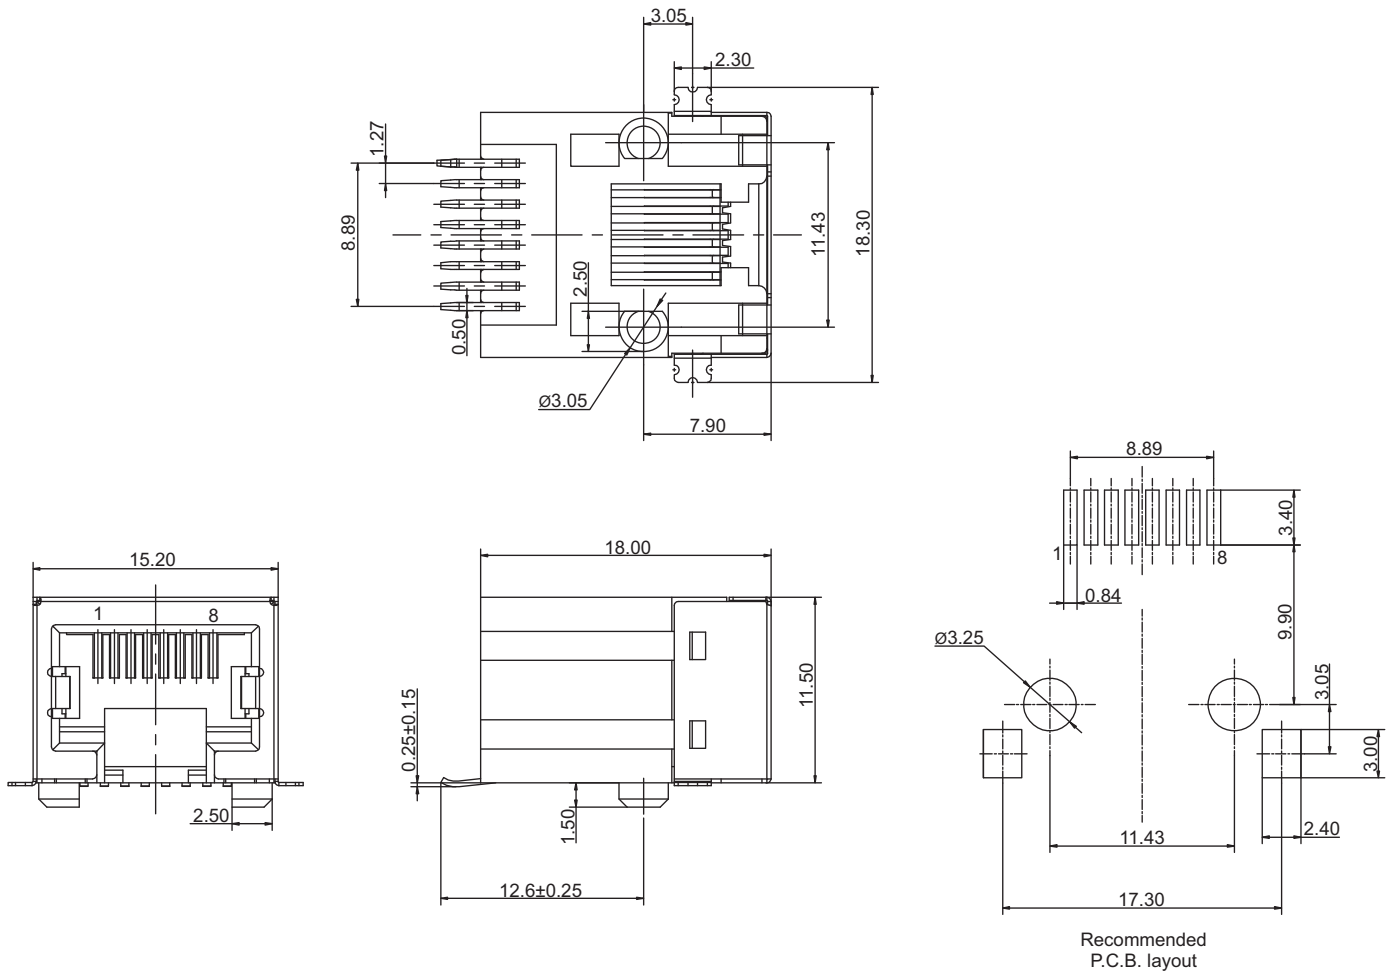

Tolerances		
Linear	>30	± 0.25
	15 to 30	± 0.20
	<15	± 0.15

Part numbering guide

64204 — C

Series

Contact plating

C = 3 μ" gold K = 50 μ" gold

D = 6 μ" gold

F = 15 μ" gold

J = 30 μ" gold

* standard

