


Specifications	
Contact rating	0.4 VA max. @ 20 V AC / DC
Durability	40000 cycles at full load
Contact resistance	50 mΩ max. initial @ 3 VDC, 100 mA
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC
Operation temperature	-30 °C to +85 °C
Materials	
Case	Nylon 6/6
Actuator and frame	Nylon 6/6
Contact and terminal	Copper alloy, plating: see table and order code
Switch support	Copper alloy, plating: tin
Slide Button	POM
Waterproof cover	Silica gel

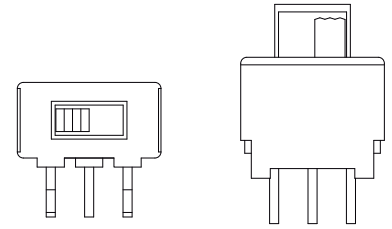

Part numbering guide


S **W** - **S** **S** - **4** - **C** **K** - - **H**

Switch Function		Termination		Contact Plating		Package Style		RoHS Code
SS-4	SP on-none-on	C	Straight	K	gold / tin (std.)	(none)	bag or box	H = RoHS Compliant
SS-4A	SP on-off-on	H	Right angle	R	gold	T/R	tape & reel	
SS-5	DP on-none-on							
SS-5A	DP on-off-on							

Contact material option


Code	Contact material	Terminal material	Rating
K	Brass, gold plated	Copper alloy, tin plated	0.4VA MAX @ 20 V AC or DC MAX
R	Gold plated over nickel plated	Gold plated over nickel plated	0.4VA MAX @ 20 V AC or DC MAX

Straight type




SPDT
1 2 Comm 3

Model No.	Switching position		
	↔	↔	↔
SS-4-C	ON	none	ON
SS-4A-C	ON	OFF	ON
Term. Comm.	2-3	open	2-1

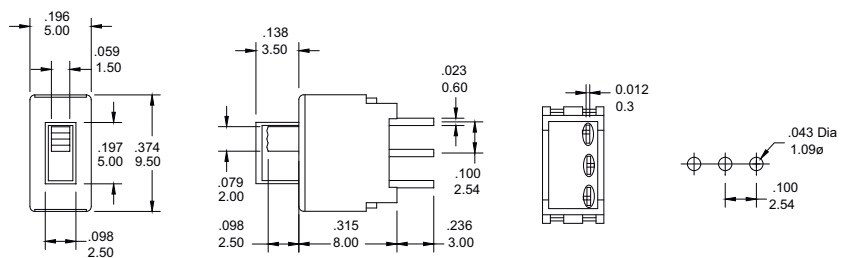


SW-SS-4-CK



DPDT
1 2 Comm 3 4 5 Comm 6

Model No.	Switching position		
	↔	↔	↔
SS-5-C	ON	none	ON
SS-5A-C	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4

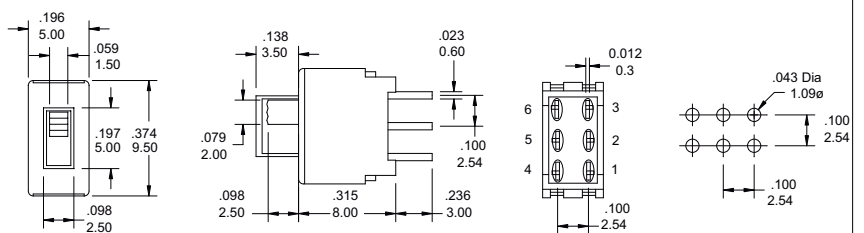

SW-SS-5-CK


continued on page 2




Right angle type



SPDT



Model No.	Switching position		
SS-4-H	ON	none	ON
SS-4A-H	ON	OFF	ON
Term. Comm.	2-3	open	2-1

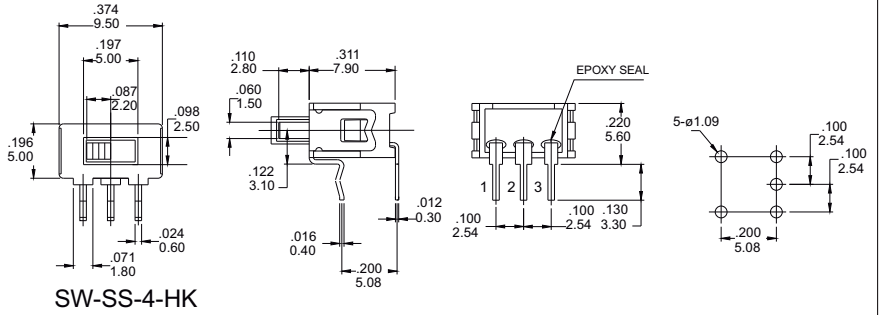

DPDT



Model No.	Switching position		
SS-5-H	ON	none	ON
SS-5A-H	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4

