

Rev. 1.0	05.07.2016	P/N.: 2257
Kd. Art.-Nr.: (Art.Nr.)		

Tape & Reel Packing

Telefon +49 (531) 23 14 2-0
 Telefax +49 (531) 23 14 2-55
 E-Mail info@nexus-de.com
www.nexus-de.com



NEXUS COMPONENTS
 competence in electronics






RoHS

TABLE.A TAPING REEL (BOM PER 13" REEL):



CIRCUITS	DIM.D	DIM.E	DIM.F
2 ~ 3 PIN	25.5	24.0	---
4 ~ 5 PIN	33.5	32.0	28.40
6 ~ 10 PIN	45.5	44.0	40.40
11 ~ 15 PIN	57.5	56.0	52.40

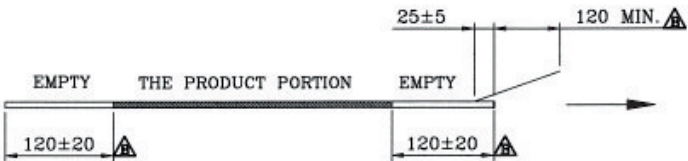


DETAIL "Y"

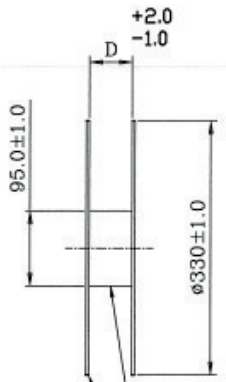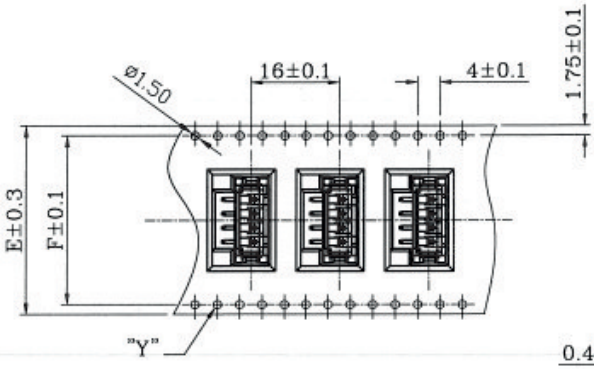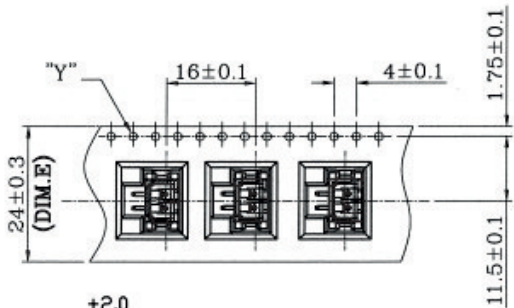

POLYSTYRENE
 13" PAPER PLATE



DETAIL "X"

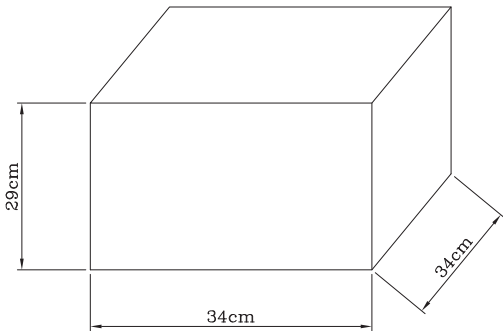

NOTES: 1.Pitch Tolerance Over Any 10 Pitch±0.20.
 2.Material : PS Black-Thickness : 0.4±0.05.
 3.Component Load Per 13" Reel : 500 Pcs.
 4.All dimension meet EIA-481-D requirements.