


# 65323 Series RJ45 10P Side Entry Shielded


General specifications	
Insulator material	Polyester w/ glass fiber, UL94V-0, color: black
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	30 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles
Mating parts series	

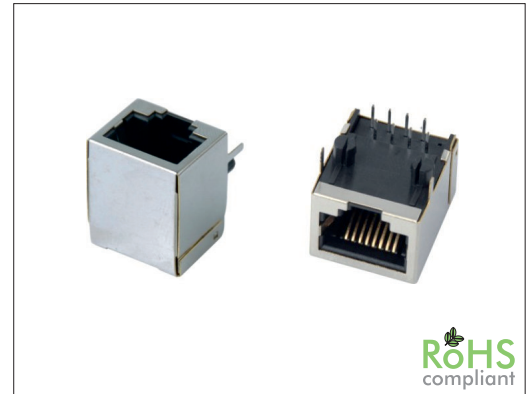

RoHS  
compliant

## Mechanical dimensions

Unit: mm

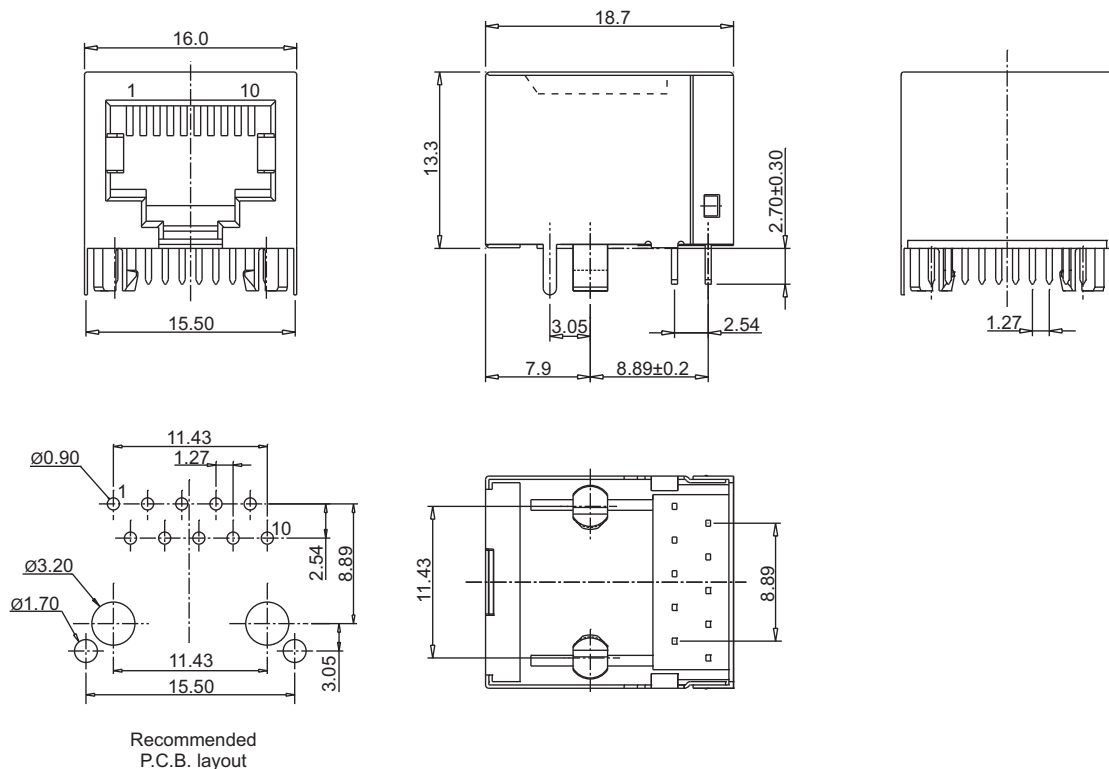

Tolerances		
Linear	X	± 0.20
	.XX	± 0.15
	.XXX	± 0.10

## Part numbering guide

65323

C

8

Series

Contact plating

No. of contacts

C = 3 μ" gold K = 50 μ" gold

8 = 8

D = 6 μ" gold

1 = 10

F = 15 μ" gold

J = 30 μ" gold

\* standard

