

Series 43607 6x RCA Jack / Cinch Horizontal

Material

Base, insulator: ABS
 Color washer: PBT + 15% glass fiber
 Contact break / needle: H65 Brass / QSn 6.5-0.1




Electrical

Rating: 0.2 Amp @ 50 VDC
 Contact resistance: 30 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectrical withstanding: 500 VAC/minute
 Operating temperature: -40°C ~ +70°C
 Durability: 500 cycles


43607Z




43607Z

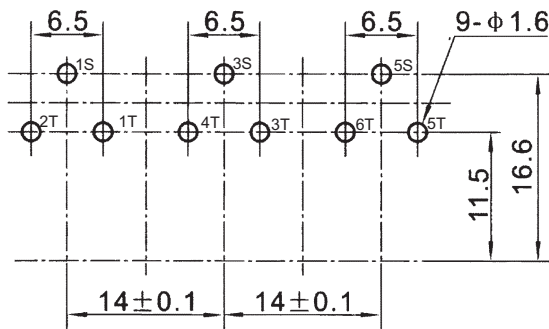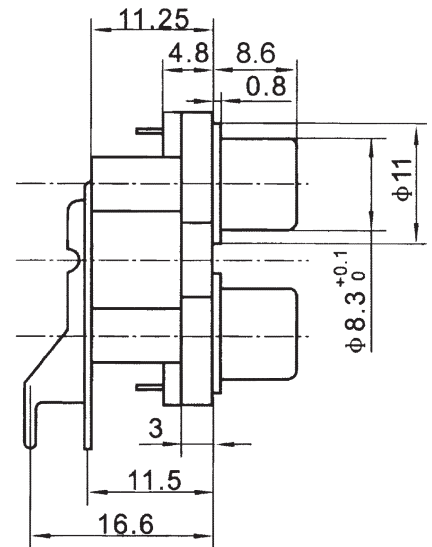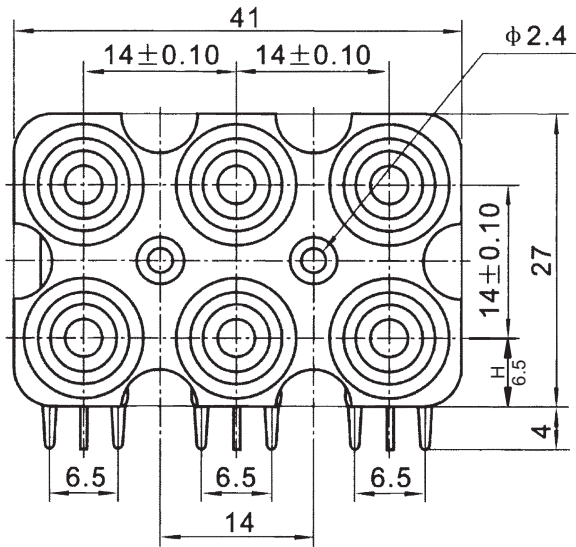

Recommended P.C.B. Layout

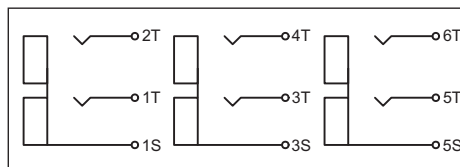

Color layout



Code	A D	B E	C F
01	green red	blue white	red black
02	green red	blue white	red orange
03	t.b.d. by customer		

Tolerances	
Linear	<6 ± 0.1 6-20 ± 0.2 >20 ± 0.3



All dim. in mm

43607 Z — **01**

Series 43607Z Color code see table Packing Box