

1211 Series

1.27 x 2.54 mm Board Spacer

General specifications

Insulator material	Nylon-6T, UL94V-0, color: black
Contact material	Brass
Current rating	1 A
Contact resistance	20 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process

Mating parts series


1231, 1235, 1280



RoHS
compliant

Mechanical dimensions

Unit: mm

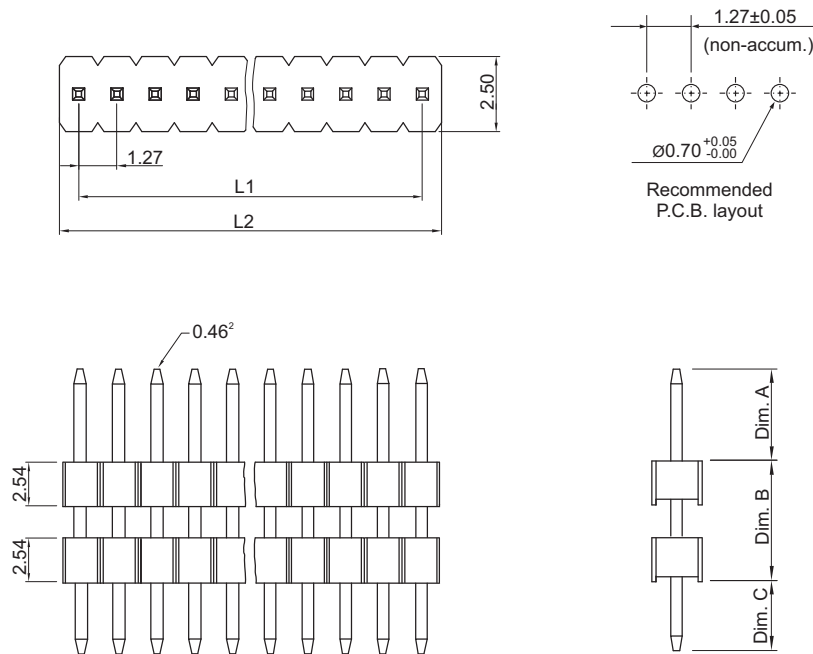

$$L1 = (\text{No. of contacts} - 1) \times 1.27$$

$$L2 = \text{No. of contacts} \times 1.27$$

Tolerances		
Linear	X	± 0.38
	.XX	± 0.25

Ordercode dimensions			
Index	Dim. A	Dim. B	Dim. C
00	2.80	6.05	2.40
other pin length on customer request			

Part numbering guide

1211 S — 02 — B — 00

Series
S = THT straight

No. of contacts
02 to 40

Contact plating
B = Flashgold
E = 10 μ" gold
F = 15 μ" gold
J = 30 μ" gold

Dimensions index
see table

* standard

