


General specifications

Insulator material	LCP, UL94V-0, color: nature
Contact material	Phosphor bronze
Current rating	0.5 A
Voltage rating	50 VAC
Contact resistance	30 mΩ max.
Insulator resistance	500 MΩ min.
Dielectrical withstanding	250 VDC for 1 min
Operating temperature	-55 °C to +85 °C
Soldering	JEDEC lead free reflow soldering process


Mating parts series

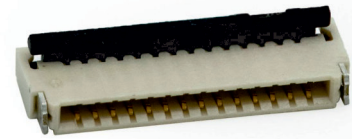

RoHS
compliant

Mechanical dimensions

Unit: mm

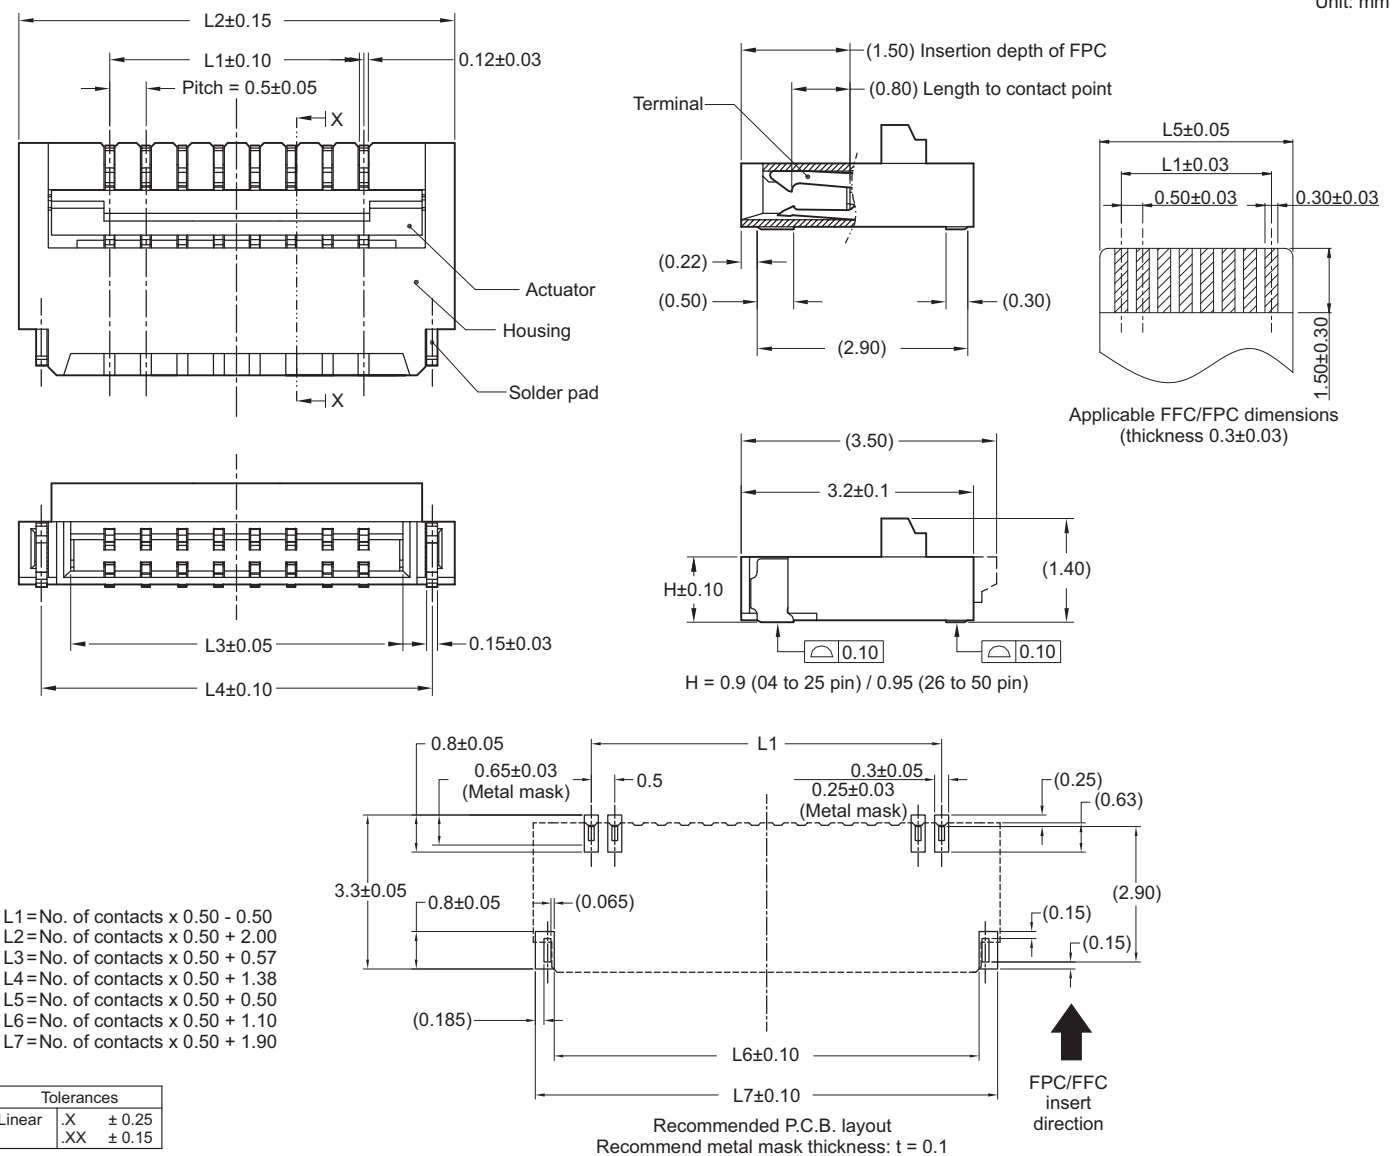

Part numbering guide

2961 H	04	T	R
Series	No. of contacts	Contact plating	Packing
H = SMT horizontal	4 to 50	T = Tin B = Flashgold	R = Reel T = Tube

* standard

