


General specifications	
Insulator material	High temperature plastic, UL94V-0, color: nature
Contact material	Brass
Current rating	1.2 A
Contact resistance	15 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	750 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	JEDEC lead free reflow soldering process
Mating parts series	
2283-IP or cable assembly	



## Mechanical dimensions

Unit: mm

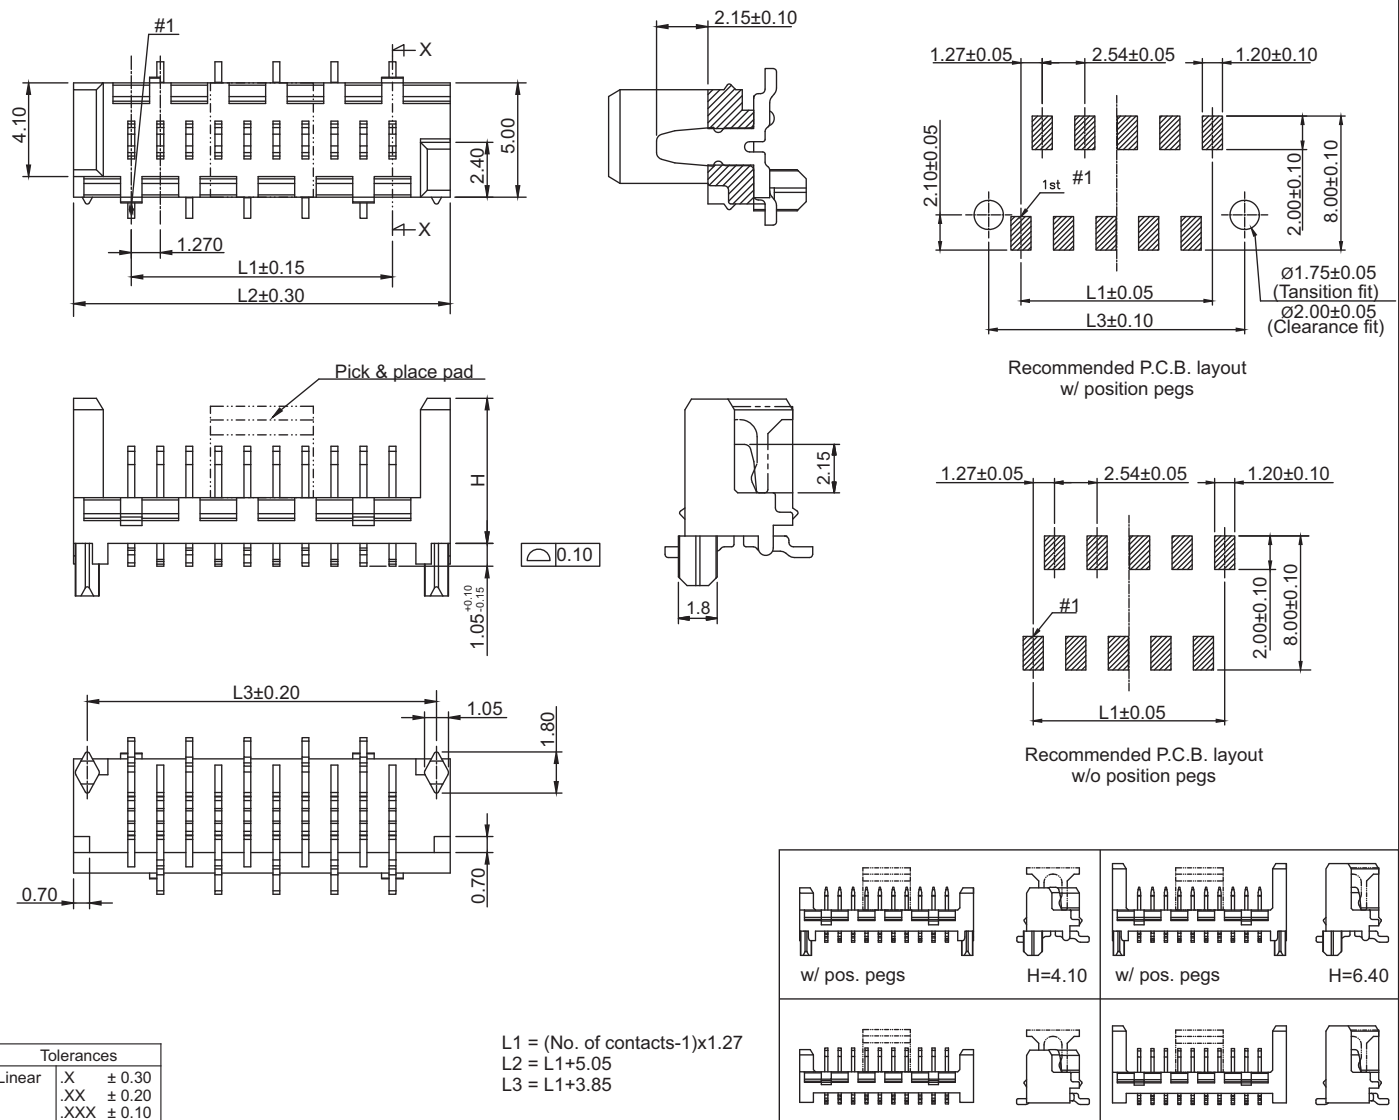

## Part numbering guide

<b>2283 V</b>	<b>04</b>	<b>T</b>	<b>0</b>	<b>R</b>
Series V = SMT vertical	No. of contacts 04 to 26	Contact plating T = Tin other plating on request	Position peg 0 = w/o peg, H= 4.10 1 = w/ peg, H= 4.10 2 = w/o peg, H= 6.40 3 = w/ peg, H= 6.40	Packing R = Reel T = Tube

\* standard

