

Series 43800 8x RCA Jack / Cinch



Material

Base, insulator: ABS
 Color washer: PBT + 15% glass fiber
 Contact break / needle: H65 Brass / QSn 6.5-0.1


Electrical

Rating: 0.2 Amp @ 50 VDC
 Contact resistance: 30 mΩ max.
 Insulator resistance: 100 MΩ min.
 Dielectrical withstanding: 500 VAC/minute
 Operating temperature: -40°C ~ +70°C
 Durability: 500 cycles


43800A

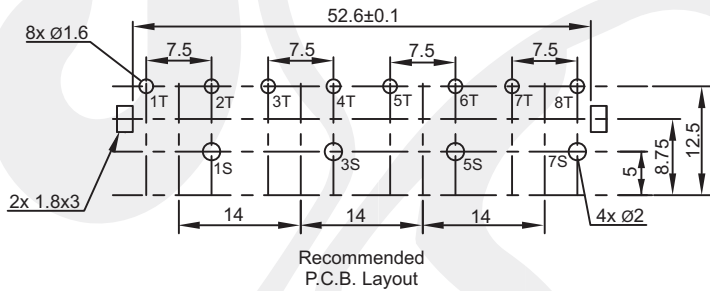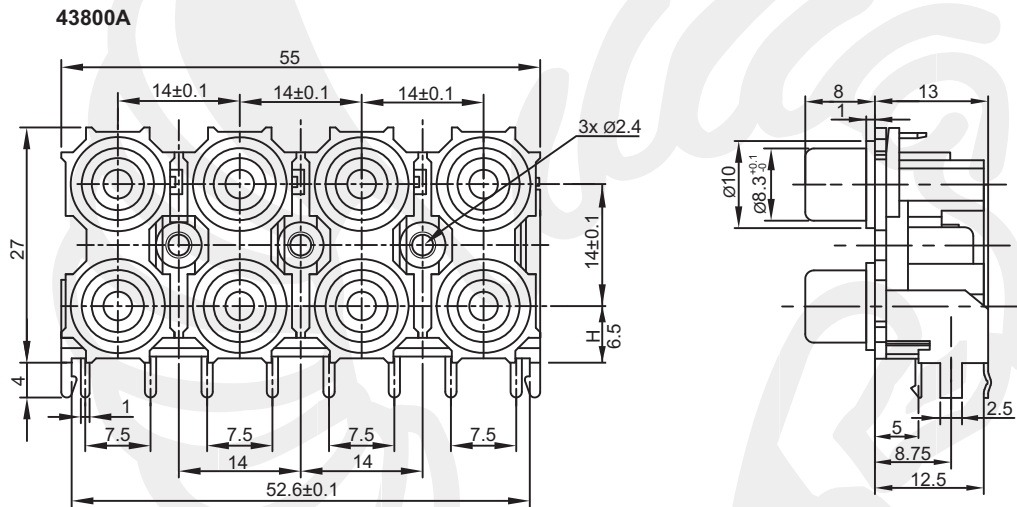

Color layout



Code	A E	B F	C G	D H
01	white red	green red	blue white	red black
02	white red	white red	green black	blue orange
03	white red	white red	white red	white red
04	t.b.d. by customer			

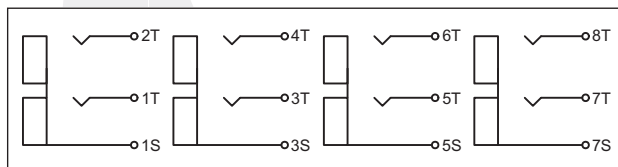

Tolerances	
Linear	<6 ± 0.1 6-20 ± 0.2 >20 ± 0.3



All dim. in mm

43800 A — **01**


Series 43800A
 43800B
 43800C

Color code see table

Packing Box

Series 43800 8x RCA Jack / Cinch




43800B

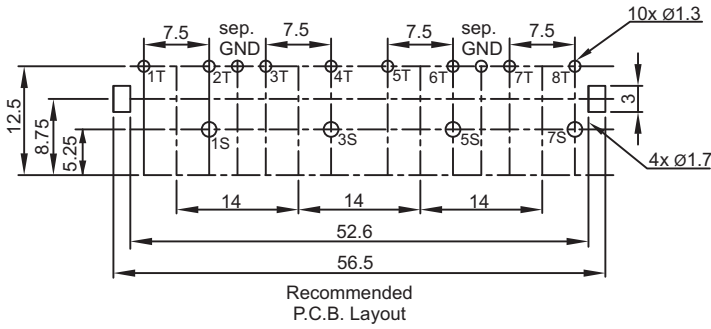





43800B



43800C

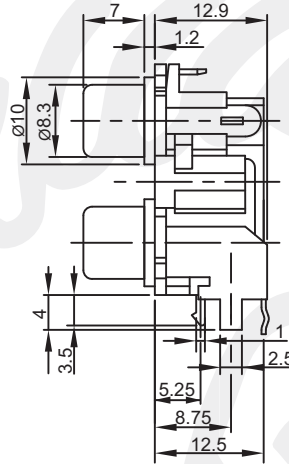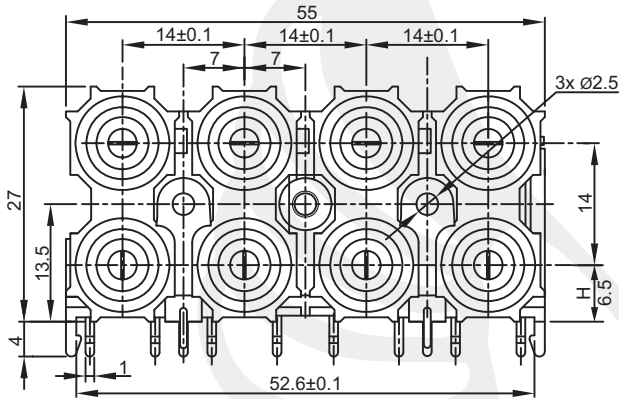

43800C

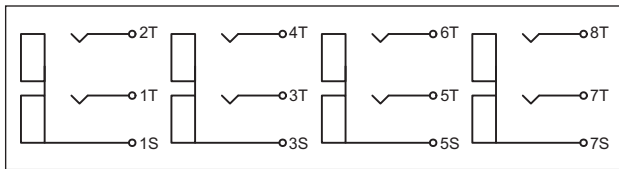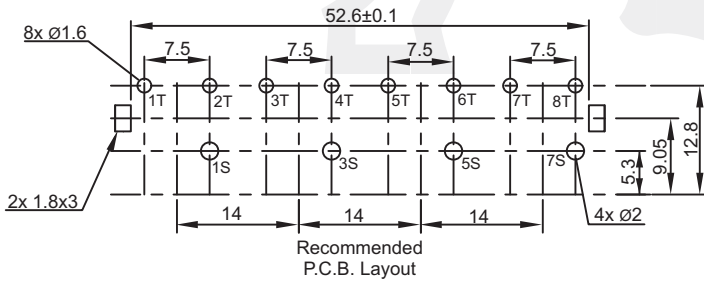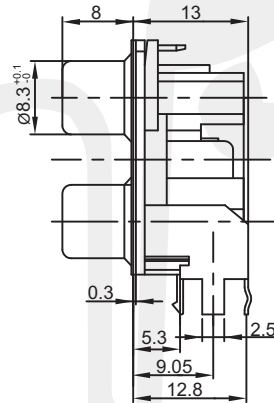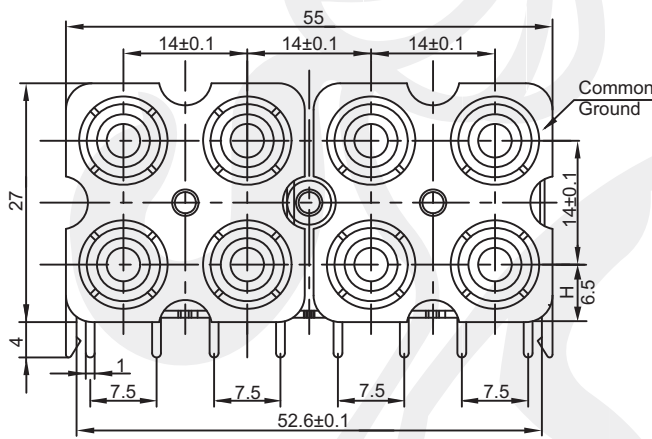

Tolerances	
Linear	<6 ± 0.1
	6-20 ± 0.2
	>20 ± 0.3



All dim. in mm