


2.00 mm Pin Header w/ Lock Dual Row

General specifications

Insulator material	PBT w/ glass fiber, UL94V-0, color: white
Contact material	Brass
Current rating	3 A
Voltage rating	250 VAC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ @ 500 VDC
Dielectrical withstanding	800 VAC for 1 min
Operating temperature	-25 °C to +85 °C
Soldering	Lead free wave soldering process

Mating parts series







2206-PT or cable assembly






Mechanical dimensions

Unit: mm

2206S

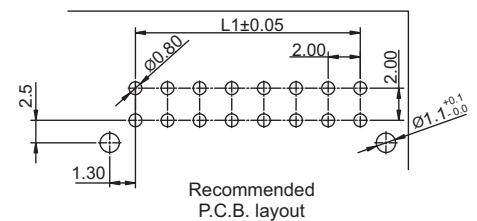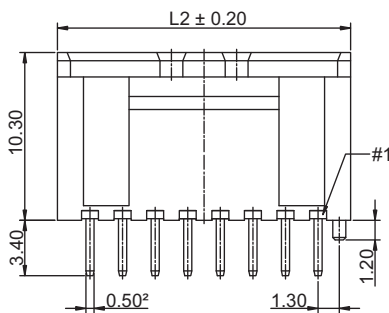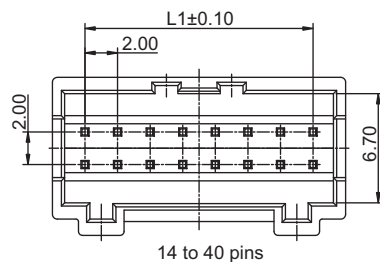

2206R

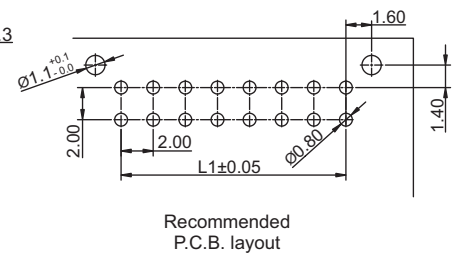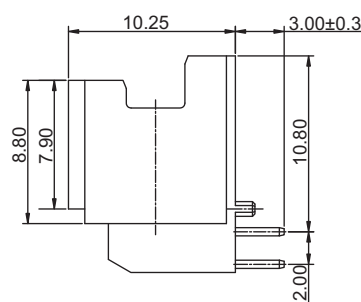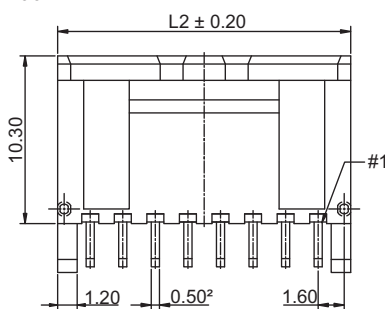

Tolerances		
Linear	.X	± 0.25
	.XX	± 0.12
	.XXX	± 0.08

L1 = No. of contacts - 2.00
L2 = No. of contacts + 2.00

Part numbering guide

2206 S	10	T
Series S = THT straight R = THT right angle	No. of contacts 10 to 40	Contact plating T = Tin

* standard

