49381 Series Adapter F Plug to IEC-PAL Jack

General specifications	
Insulator material	Teflon, Delrin
Body material	Brass, plating: nickel
Center contact material	Phosphor bronze or brass, plating: nickel
Contact resistance	center: 10 mΩ max. / outer: 6 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Frequency range	0 to 1 GHz
Impedance	75 Ω
Operating temperature	-65 °C to +125 °C
Durability	500 cycles

RoHS compliant

Mechanical dimensions

Unit: mm

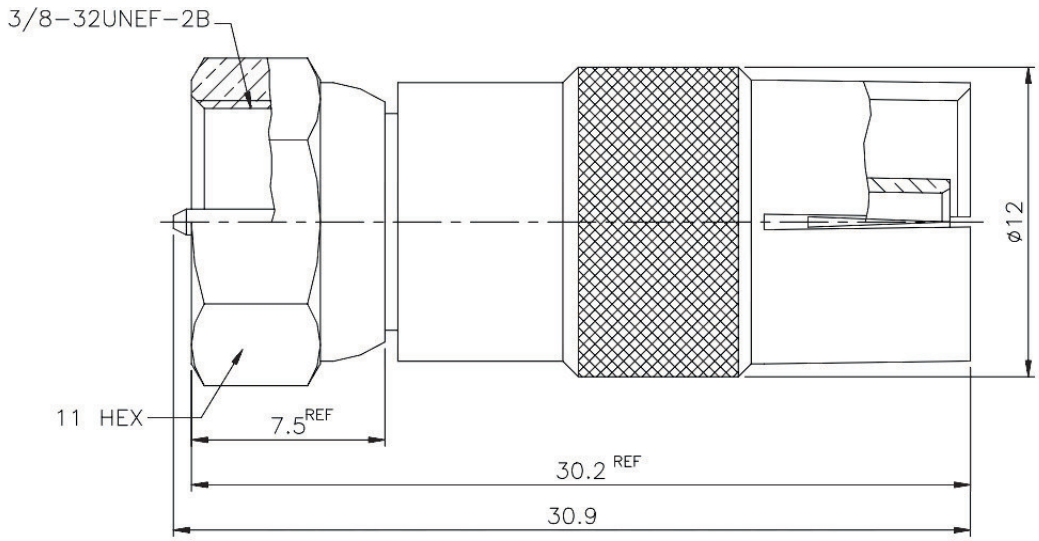

Tolerances		
Linear	.X	± 0.30
	.XX	± 0.10

Part numbering guide

49381

Series

* standard

info@nexus-de.com
www.nexus-de.com
phone +49 (0)531 / 23 142-0
fax +49 (0)531 / 23 142-55

NEXUS COMPONENTS
competence in electronics