


62110 Series RJ11 / RJ12 Top Entry

General specifications

Insulator material	PBT w/ glass fiber, UL94V-0
Contact material	Phosphor bronze
Current rating	1 A
Voltage rating	150 VAC
Contact resistance	50 mΩ max.
Insulator resistance	200 MΩ min. @ 500 VDC
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles


Mating parts series

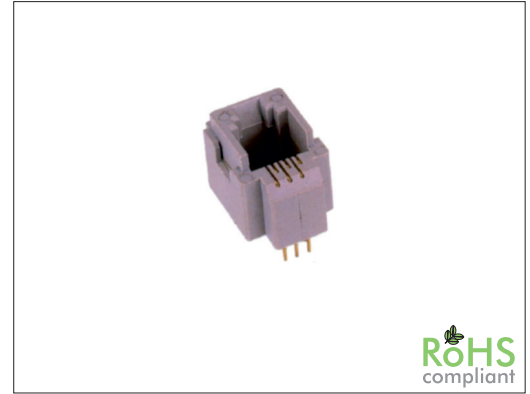

RoHS
compliant

Mechanical dimensions

Unit: mm

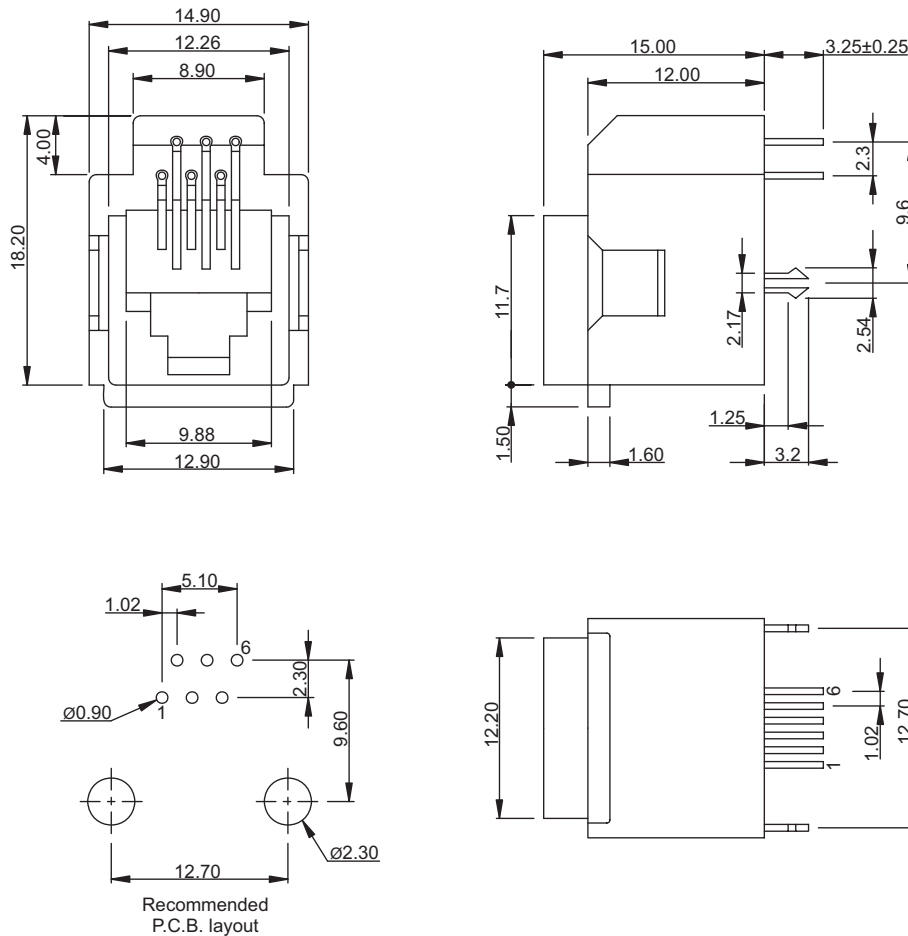

Tolerances		
Linear	X	± 0.25
	.XX	± 0.13
	.XXX	± 0.05

Part numbering guide

62110	C	6	M	B
Series	Contact plating C = 3 μ" gold D = 6 μ" gold F = 15 μ" gold	No. of contacts 4, 6	Board locks M = Metal board locks	Color B = Black G = Grey
	J = 30 μ" gold K = 50 μ" gold			

* standard

