

1579 Series


2.54 mm Female Header Dual Row Side Entry

General specifications

Insulator material	Nylon 6T, UL94V-0
Contact material	Brass
Current rating	3 A
Contact resistance	20 mΩ max.
Insulator resistance	5000 MΩ min.
Dielectrical withstanding	500 VAC for 1 min
Operating temperature	-40 °C to +105 °C
Soldering	Lead free wave soldering process

Mating parts series



1623

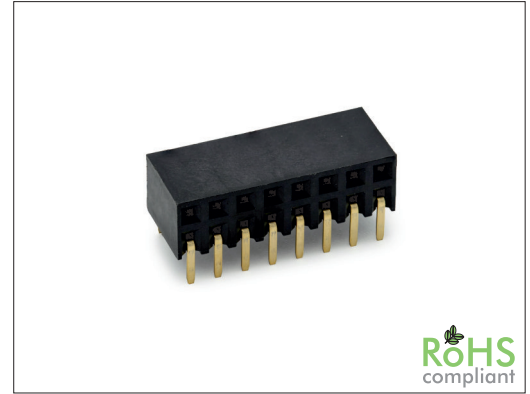

RoHS
compliant


Mechanical dimensions

Unit: mm

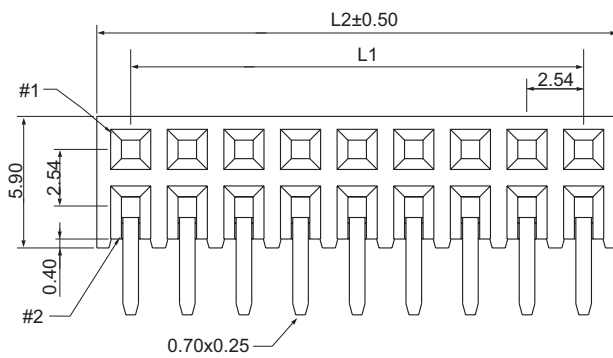

$$L1 = \left(\frac{\text{No. of contacts}}{2} - 1 \right) \times 2.54$$

$$L2 = \left(\frac{\text{No. of contacts}}{2} \right) \times 2.54$$



Recommended P.C.B. layout

Tolerances

Linear	X	± 0.38
	.XX	± 0.25

Part numbering guide

1579 R

04

B

Series
R = THT right angle

No. of contacts
04 to 80

Contact plating
B = Flashgold
E = 10 μm gold
F = 15 μm gold
J = 30 μm gold

* standard

