

64A22 Series RJ45 8P 45° Shielded

General specifications

Insulator material	PBT, UL94V-0
Contact material	Phosphor bronze
Current rating	1.5 A
Voltage rating	125 VAC
Contact resistance	45 mΩ max.
Insulator resistance	1000 MΩ min.
Dielectrical withstanding	1000 VAC for 1 min
Operating temperature	-40 °C to +85 °C
Soldering	Lead free wave soldering process
Durability	750 cycles




Mating parts series



RoHS
compliant

Mechanical dimensions

Unit: mm

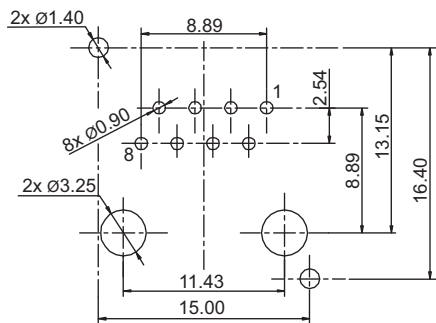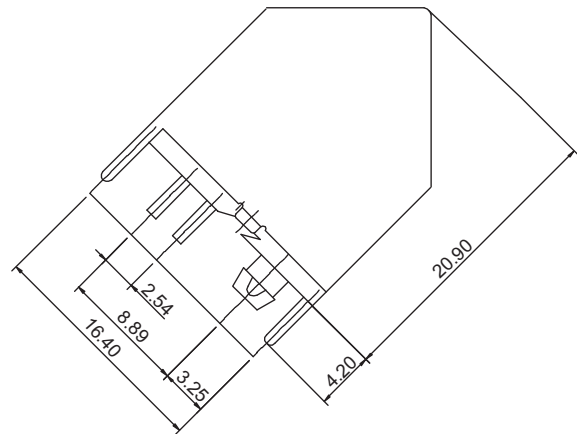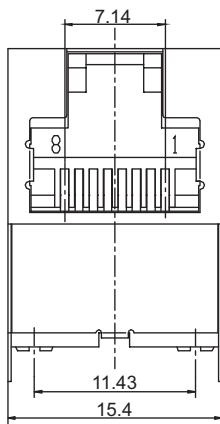

Recommended
P.C.B. layout

Tolerances

Linear	X	± 0.25
	.XX	± 0.20
	.XXX	± 0.10

Part numbering guide

64A22

Series

C

Contact plating

C = 3 μ" gold K = 50 μ" gold

D = 6 μ" gold

F = 15 μ" gold

J = 30 μ" gold

B

Color

B = Black

W = White

* standard

